

SBT

JIS B 6339

PRECISION TOOL HOLDERS SYSTEM





SBT 数控刀柄系列

CNC TOOL SYSTEMS

数控刀柄系列 CNC TOOL SYSTEMS

SBT 两面定位主轴系统

SBT SPINDLE SYSTEM



- 通过确立完善的量规系统，实现了锥面、端面同时两面定位的系统。



SBT 刀柄的各种优点：

- 提高加工表面光洁度和加工尺寸精度
- 提高 ATC 自动换刀的重重复精度
- 延长刀具寿命
- 高速旋转时 Z 轴方向尺寸稳定
- 高刚性 适合重切削
- 提高镗孔加工的圆度

拉入量对于端面紧贴很重要！！

刀柄在未被拉紧时，与主轴端面有微小间隙。通过拉紧装置拉入，主轴因弹性形变产生扩张，实现端面完全贴紧。因此，确保端面紧贴的拉入量非常重要。

《参考值》


主轴规格	拉紧力	拉入量
#40	800Kg	20 μ m
#50	2000Kg	20 μ m

上表中的数值仅供参考，拉入量因主轴形状及紧固机构而异。（本公司加工中心的实测值）


增加刀柄的基准直径，刚性增强。

根据力学原理，基准直径越大刚性越强，普通的 BT 刀柄的基准直径是锥柄的大端直径、而端面紧贴的 SBT 系统的基准直径是法兰外径。因此，SBT 刀柄刚性有了显著增强。

BT30 锥柄	$\phi 31.75$	$\phi 46$
BT40 锥柄	$\phi 44.45$	$\phi 63$
BT50 锥柄	$\phi 69.85$	$\phi 100$



“SBT 主轴”与“SBT 刀柄”的最强组合

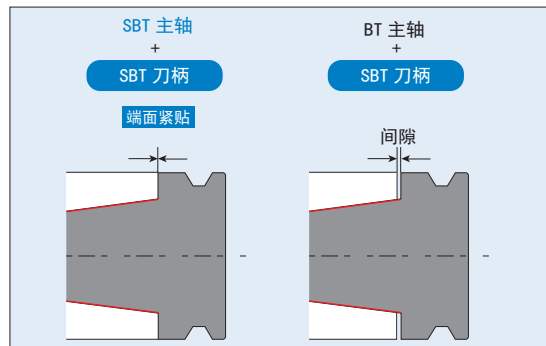


刀柄除端面位置尺寸外，其他尺寸均以 MAS-BT 规格为标准。

SBT 主轴系统通过组合 SBT 刀柄与 SBT 主轴，可最大限度地发挥两面定位的性能。SBT 刀柄也可使用原有标准规格的 BT 主轴，但这种情况下没有两面定位功能。为了发挥两面定位的优异性能，请在 SBT 主轴中使用 SBT 刀柄。另外，使用 SBT 刀柄以外的两面定位刀柄时，可能会损伤机床主轴，敬请注意。

建议在 SBT 主轴中使用 SBT 刀柄。

请勿在 SBT 主轴中混用 SBT 刀柄和 BT 刀柄。

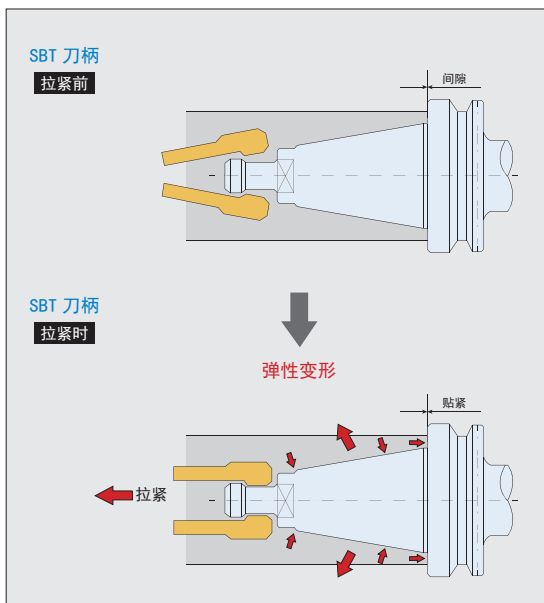

数控刀柄系列CNC TOOL SYSTEMS

SBT30-PHC 液压刀柄

SBT30-PHC HYDRAULIC TOOL HOLDER



FIG. 1


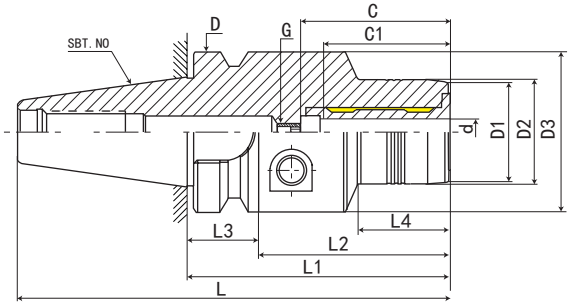


FIG. 2

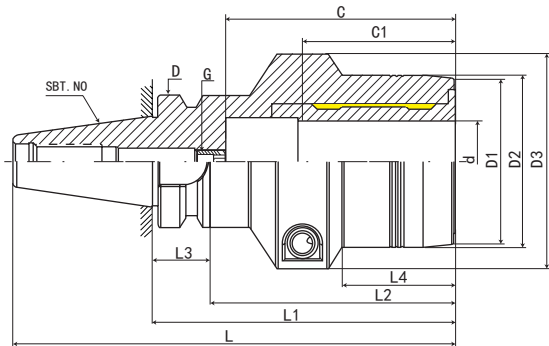

型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max. insertion depth	最少插入深度 C1 Min insertion depth	G	FIG	重量 KGS
SBT30-PHC03-60	108.4	60	38	22	28	46	20	23	45	3	*	18	*	1	0.75
SBT30-PHC3.175-60	108.4	60	38	22	28	46	20	23	45	3.175	*	18	*	1	0.75
SBT30-PHC04-60	108.4	60	38	22	28	46	21	24	45	4	*	24	*	1	0.75
SBT30-PHC05-60	108.4	60	38	22	28	46	22	25	45	5	*	26	*	1	0.75
SBT30-PHC06-70	118.4	70	48	22	28	46	23	26	45	6	37	27	M5*0.8P	1	0.8
SBT30-PHC08-70	118.4	70	48	22	28	46	25	28	45	8	37	27	M6*1.0P	1	0.85
SBT30-PHC10-75	123.4	75	53	22	36	46	27	30	45	10	41	31	M8*1.0P	1	0.85
SBT30-PHC12-75	123.4	75	53	22	36	46	29	32	45	12	46	36	M10*1.0P	1	0.85
SBT30-PHC14-85	133.4	85	63	22	44	46	31	34	45	14	46	36	M10*1.0P	1	0.95
SBT30-PHC16-90	138.4	90	68	22	48	46	35	38	45	16	52	39	M12*1.0P	1	1.05
SBT30-PHC18-90	138.4	90	68	22	48	46	37	40	45	18	52	39	M12*1.0P	1	1.1
SBT30-PHC20-90	138.4	90	68	22	48	46	39	42	45	20	52	41	M16*1.0P	1	1.15
SBT30-PHC25-105	153.4	105	83	22	44	46	52	55	63	25	80	47	M16*1.0P	2	1.65
SBT30-PHC32-105	153.4	105	83	22	39	46	57	60	68	32	80	51	M16*1.0P	2	1.8

SBT30 - PHC - 03 - 60

L1 长度 Length (L1)



刀杆直径 Diameter

功能代号 Holder type

锥柄形式 Taper size

SBT40-PHC 液压刀柄

SBT40-PHC HYDRAULIC TOOL HOLDER

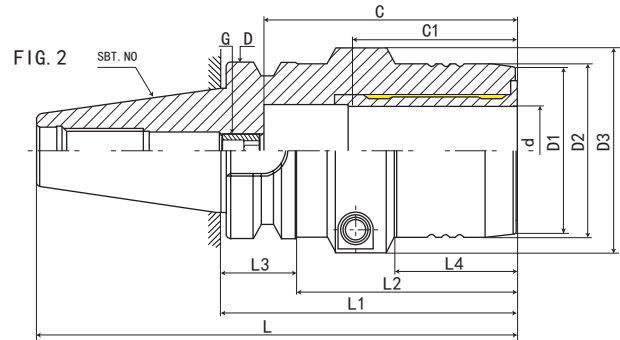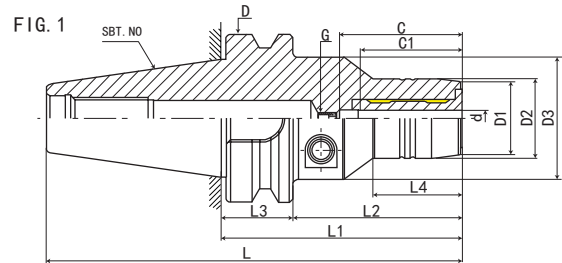

型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max. insertion depth	最少插入深度 C1 Min insertion depth	G	FIG	重量 KGS
SBT40-PHC03-75	140.4	75	48	27	26	63	20	23	50	3	*	18	*	1	1.28
SBT40-PHC03-90	155.4	90	63	27	29	63	20	23	50	3	*	18	*	1	1.38
SBT40-PHC3.175-75	140.4	75	48	27	26	63	20	23	50	3.175	*	18	*	1	1.28
SBT40-PHC3.175-90	155.4	90	63	27	29	63	20	23	50	3.175	*	18	*	1	1.38
SBT40-PHC04-75	140.4	75	48	27	26	63	21	24	50	4	*	24	*	1	1.28
SBT40-PHC04-90	155.4	90	63	27	29	63	21	24	50	4	*	24	*	1	1.38
SBT40-PHC05-75	140.4	75	48	27	26	63	22	25	50	5	*	26	*	1	1.3
SBT40-PHC05-90	155.4	90	63	27	29	63	22	25	50	5	*	26	*	1	1.4
SBT40-PHC06-75	140.4	75	48	27	26	63	23	26	50	6	37	27	M5*0.8P	1	1.32
SBT40-PHC06-90	155.4	90	63	27	29	63	23	26	50	6	37	27	M5*0.8P	1	1.41
SBT40-PHC08-75	140.4	75	48	27	26	63	25	28	50	8	37	27	M6*1.0P	1	1.36
SBT40-PHC08-90	155.4	90	63	27	30	63	25	28	50	8	37	27	M6*1.0P	1	1.46
SBT40-PHC10-75	140.4	75	48	27	26	63	27	30	50	10	41	31	M8*1.0P	1	1.43
SBT40-PHC10-90	155.4	90	63	27	35	63	27	30	50	10	41	31	M8*1.0P	1	1.57
SBT40-PHC12-75	140.4	75	48	27	26	63	29	32	50	12	46	36	M10*1.0P	1	1.46
SBT40-PHC12-90	155.4	90	63	27	40	63	29	32	50	12	46	36	M10*1.0P	1	1.62
SBT40-PHC14-75	140.4	75	48	27	26	63	31	34	50	14	46	36	M10*1.0P	1	1.48
SBT40-PHC14-90	155.4	90	63	27	40	63	31	34	50	14	46	36	M10*1.0P	1	1.68
SBT40-PHC16-75	140.4	75	48	27	26	63	35	38	50	16	75	39	M12*1.0P	1	1.51
SBT40-PHC16-90	155.4	90	63	27	45	63	35	38	50	16	75	39	M12*1.0P	1	1.7
SBT40-PHC18-75	140.4	75	48	27	26	63	37	40	50	18	75	39	M12*1.0P	1	1.51
SBT40-PHC18-90	155.4	90	63	27	46	63	37	40	50	18	75	39	M12*1.0P	1	1.7
SBT40-PHC20-75	140.4	75	48	27	26	63	39	42	50	20	80	41	M16*1.0P	1	1.52
SBT40-PHC20-90	155.4	90	63	27	47	63	39	42	50	20	80	41	M16*1.0P	1	1.75
SBT40-PHC25-105	170.4	105	78	27	50	63	52	55	63	25	80	47	M16*1.0P	1	2.05
SBT40-PHC32-105	170.4	105	78	27	48	63	60	63	73	32	90	51	M16*1.0P	2	2.34
SBT40-PHC40-120	185.4	120	93	27		63				40	90		M16*1.0P	2	3
SBT40-PHC42-120	185.4	120	93	27		63				42	90		M16*1.0P	2	3


SBT40 - PHC - 03 - 75

- SBT40 - 锥柄形式 Taper size
- PHC - 功能代号 Holder type
- 03 - 刀杆直径 Diameter
- 75 - L1 长度 Length (L1)


数控刀柄系列CNC TOOL SYSTEMS

SBT50-PHC 液压刀柄

SBT50-PHC HYDRAULIC TOOL HOLDER

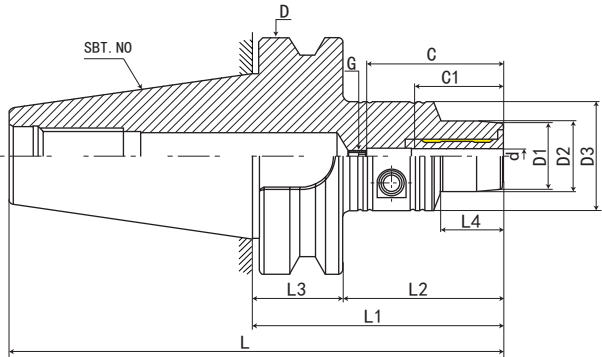


型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max. insertion depth	最少插入深度 C1 Min insertion depth	G	重量 KGS
SBT50-PHC05-90	191.8	90	52	38	32	100	22	25	49.5	5	*	26	*	4.2
SBT50-PHC05-120	221.8	120	82	38	44	100	22	25	49.5	5	*	26	*	4.5
SBT50-PHC06-90	191.8	90	52	38	32	100	23	26	49.5	6	37	27	M5*0.8P	4.2
SBT50-PHC06-120	221.8	120	82	38	44	100	23	26	49.5	6	37	27	M5*0.8P	4.5
SBT50-PHC08-90	191.8	90	52	38	32	100	25	28	49.5	8	37	27	M6*1.0P	4.2
SBT50-PHC08-120	221.8	120	82	38	44	100	25	28	49.5	8	37	27	M6*1.0P	4.5
SBT50-PHC10-90	191.8	90	52	38	32	100	27	30	49.5	10	41	31	M8*1.0P	4.2
SBT50-PHC10-120	221.8	120	82	38	44	100	27	30	49.5	10	41	31	M8*1.0P	4.5
SBT50-PHC12-90	191.8	90	52	38	32	100	29	32	49.5	12	46	36	M10*1.0P	4.3
SBT50-PHC12-120	221.8	120	82	38	44	100	29	32	49.5	12	46	36	M10*1.0P	4.5
SBT50-PHC14-90	191.8	90	52	38	32	100	31	34	49.5	14	46	36	M10*1.0P	4.3
SBT50-PHC14-120	221.8	120	82	38	44	100	31	34	49.5	14	46	36	M10*1.0P	4.6
SBT50-PHC16-90	191.8	90	52	38	32	100	35	38	49.5	16	75	39	M12*1.0P	4.3
SBT50-PHC16-120	221.8	120	82	38	48	100	35	38	49.5	16	75	39	M12*1.0P	4.6
SBT50-PHC18-90	191.8	90	52	38	32	100	37	40	49.5	18	75	39	M12*1.0P	4.4
SBT50-PHC18-120	221.8	120	82	38	48	100	37	40	49.5	18	75	39	M12*1.0P	4.6
SBT50-PHC20-90	191.8	90	52	38	32	100	39	42	49.5	20	75	41	M16*1.0P	4.4
SBT50-PHC20-120	221.8	120	82	38	48	100	39	42	49.5	20	75	41	M16*1.0P	4.7
SBT50-PHC25-120	221.8	120	82	38	48	100	53	57	63	25	80	47	M16*1.0P	4.9
SBT50-PHC32-120	221.8	120	82	38	48	100	58	62	70	32	90	51	M16*1.0P	5.2
SBT50-PHC40-120	221.8	120	82	38		100				40	90	61	M16*1.0P	6
SBT50-PHC42-120	221.8	120	82	38		100				42	90	61	M16*1.0P	6
SBT50-PHC50-120	221.8	120	82	38		100				50	90	61	M16*1.0P	7

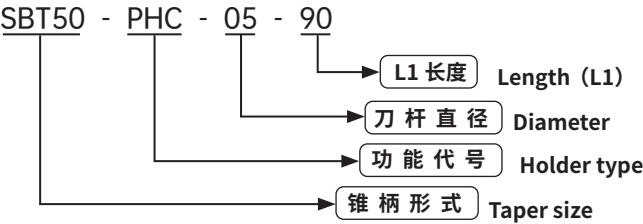


SBT30-SPHC 液压刀柄

SBT30-SPHC HYDRAULIC TOOL HOLDER

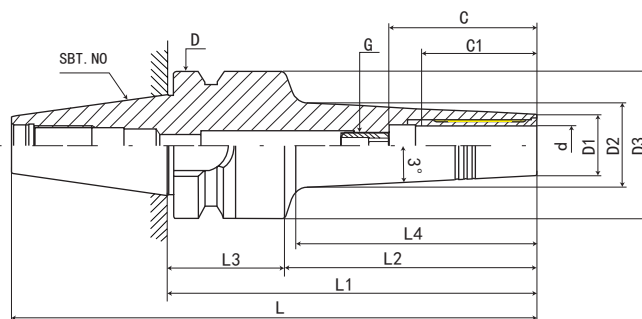

型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max.insertiondepth	最少插入深度 C1 Mininsertiondepth	G	重量 KGS
SBT30-SPHC03-85	133.4	85	63	22	42	46	11		45	3	*	18	*	1.1
SBT30-SPHC04-85	133.4	85	63	22	42	46	11		45	4	*	24	*	1.1
SBT30-SPHC05-85	133.4	85	63	22	42	46	12		45	5	*	26	*	1.4
SBT30-SPHC06-115	163.4	115	93	22	74	46	13		45	6	37	27	M5*0.8P	1.4
SBT30-SPHC08-115	163.4	115	93	22	74	46	15		45	8	37	27	M6*1.0P	1.4
SBT30-SPHC10-115	163.4	115	93	22	74	46	17		45	10	41	31	M8*1.0P	1.4
SBT30-SPHC12-115	163.4	115	93	22	75	46	19		45	12	46	36	M10*1.0P	1.4

SBT30 - SPHC - 03 - 85


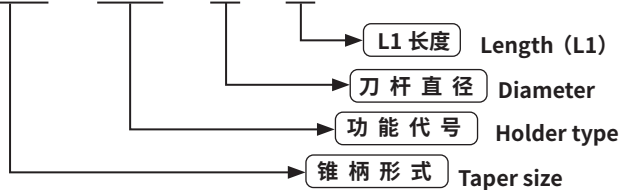


CNC TOOLS
数控刀柄

数控刀柄系列 CNC TOOL SYSTEMS

SBT40-SPHC 液压刀柄

SBT40-SPHC HYDRAULIC TOOL HOLDER

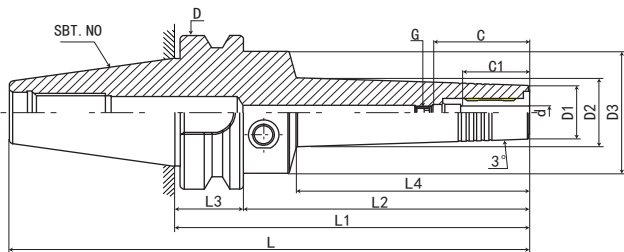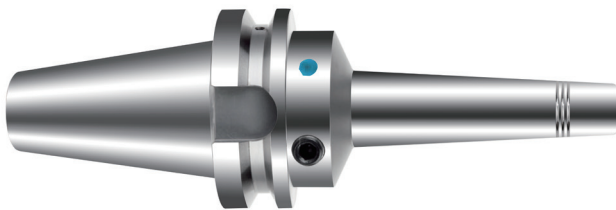

型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max. insertion depth	最少插入深度 C1 Min insertion depth	G	重量 KGS
SBT40-SPHC03-90	155.4	90	63	27	42	63	11		46	3	*	18	*	1.1
SBT40-SPHC03-120	185.4	120	93	27	72	63	11		46	3	*	18	*	1.3
SBT40-SPHC04-90	155.4	90	63	27	42	63	11		46	4	*	24	*	1.1
SBT40-SPHC04-120	185.4	120	93	27	72	63	11		46	4	*	24	*	1.3
SBT40-SPHC05-90	155.4	90	63	27	42	63	12		46	5	*	26	*	1.4
SBT40-SPHC05-120	185.4	120	93	27	72	63	12		46	5	*	26	*	1.3
SBT40-SPHC06-120	185.4	120	93	27	74	63	13		46	6	37	27	M5*0.8P	1.4
SBT40-SPHC06-150	215.4	150	123	27	104	63	13		46	6	37	27	M5*0.8P	1.5
SBT40-SPHC06-200	265.4	200	173	27	154	63	13		46	6	37	27	M5*0.8P	1.7
SBT40-SPHC08-120	185.4	120	93	27	74	63	15		46	8	37	27	M6*1.0P	1.4
SBT40-SPHC08-150	215.4	150	123	27	104	63	15		46	8	37	27	M6*1.0P	1.5
SBT40-SPHC08-200	265.4	200	173	27	154	63	15		46	8	37	27	M6*1.0P	1.7
SBT40-SPHC10-120	185.4	120	93	27	74	63	17		46	10	41	31	M8*1.0P	1.4
SBT40-SPHC10-150	215.4	150	123	27	104	63	17		46	10	41	31	M8*1.0P	1.5
SBT40-SPHC10-200	265.4	200	173	27	154	63	17		46	10	41	31	M8*1.0P	1.7
SBT40-SPHC12-120	185.4	120	93	27	75	63	19		46	12	46	36	M10*1.0P	1.4
SBT40-SPHC12-150	215.4	150	123	27	105	63	19		46	12	46	36	M10*1.0P	1.5
SBT40-SPHC12-200	265.4	200	173	27	154	63	19		46	12	46	36	M10*1.0P	1.7
SBT40-SPHC14-120	185.4	120	93	27	75	63	21		46	14	46	36	M10*1.0P	1.4
SBT40-SPHC14-150	215.4	150	123	27	105	63	21		46	14	46	36	M10*1.0P	1.5
SBT40-SPHC14-200	265.4	200	173	27	154	63	21		46	14	46	36	M10*1.0P	1.7
SBT40-SPHC16-120	185.4	120	93	27	75	63	23		50	16	49	39	M12*1.0P	1.5
SBT40-SPHC16-150	215.4	150	123	27	105	63	23		50	16	49	39	M12*1.0P	1.6
SBT40-SPHC16-200	265.4	200	173	27	154	63	23		50	16	49	39	M12*1.0P	1.8
SBT40-SPHC18-120	185.4	120	93	27	75	63	25		50	18	49	39	M12*1.0P	1.5
SBT40-SPHC18-150	215.4	150	123	27	105	63	25		50	18	49	39	M12*1.0P	1.6
SBT40-SPHC18-200	265.4	200	173	27	154	63	25		50	18	49	39	M12*1.0P	1.8
SBT40-SPHC20-120	185.4	120	93	27	75	63	27		50	20	51	41	M16*1.0P	1.6
SBT40-SPHC20-150	215.4	150	123	27	105	63	27		50	20	51	41	M16*1.0P	1.7
SBT40-SPHC20-200	265.4	200	173	27	154	63	27		50	20	51	41	M16*1.0P	1.9

SBT40 - SPHC - 03 - 90

L1 长度 Length (L1)



刀杆直径 Diameter

功能代号 Holder type

锥柄形式 Taper size

SBT50-SPHC 液压刀柄

SBT50-SPHC HYDRAULIC TOOL HOLDER

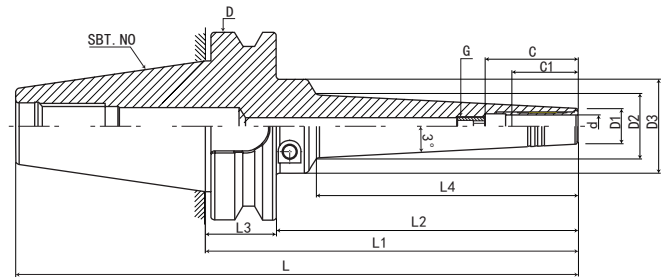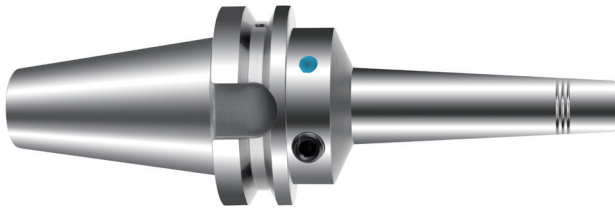

型号 Model	L	L1	L2	L3	L4	D	D1	D2	D3	d	最大插入深度 C Max. insertion depth	最少插入深度 C1 Min insertion depth	G	重量 KGS
SBT50-SPHC05-150	251.8	150	112	38	80	100	12		50	5	*	26	*	4.2
SBT50-SPHC05-200	301.8	200	162	38	130	100	12		50	5	*	26	*	4.4
SBT50-SPHC05-250	351.8	250	212	38	180	100	12		50	5	*	26	*	4.6
SBT50-SPHC05-300	401.8	300	262	38	230	100	12		50	5	*	26	*	4.8
SBT50-SPHC06-150	251.8	150	112	38	80	100	13		50	6	37	27	M5*0.8P	4.2
SBT50-SPHC06-200	301.8	200	162	38	130	100	13		50	6	37	27	M5*0.8P	4.4
SBT50-SPHC06-250	351.8	250	212	38	180	100	13		50	6	37	27	M5*0.8P	4.6
SBT50-SPHC06-300	401.8	300	262	38	230	100	13		50	6	37	27	M5*0.8P	4.8
SBT50-SPHC08-150	251.8	150	112	38	80	100	15		50	8	37	27	M6*1.0P	4.2
SBT50-SPHC08-200	301.8	200	162	38	130	100	15		50	8	37	27	M6*1.0P	4.4
SBT50-SPHC08-250	351.8	250	212	38	180	100	15		50	8	37	27	M6*1.0P	4.6
SBT50-SPHC08-300	401.8	300	262	38	230	100	15		50	8	37	27	M6*1.0P	4.8
SBT50-SPHC10-150	251.8	150	112	38	80	100	17		50	10	41	31	M8*1.0P	4.3
SBT50-SPHC10-200	301.8	200	162	38	130	100	17		50	10	41	31	M8*1.0P	4.5
SBT50-SPHC10-250	351.8	250	212	38	180	100	17		50	10	41	31	M8*1.0P	4.7
SBT50-SPHC10-300	401.8	300	262	38	230	100	17		50	10	41	31	M8*1.0P	4.9
SBT50-SPHC12-150	251.8	150	112	38	80	100	19		50	12	46	36	M10*1.0P	4.3
SBT50-SPHC12-200	301.8	200	162	38	130	100	19		50	12	46	36	M10*1.0P	4.5
SBT50-SPHC12-250	351.8	250	212	38	180	100	19		50	12	46	36	M10*1.0P	4.7
SBT50-SPHC12-300	401.8	300	262	38	230	100	19		50	12	46	36	M10*1.0P	4.9
SBT50-SPHC14-150	251.8	150	112	38	80	100	21		50	14	46	36	M10*1.0P	4.4
SBT50-SPHC14-200	301.8	200	162	38	130	100	21		50	14	46	36	M10*1.0P	4.6
SBT50-SPHC14-250	351.8	250	212	38	180	100	21		50	14	46	36	M10*1.0P	4.8
SBT50-SPHC14-300	401.8	300	262	38	230	100	21		50	14	46	36	M10*1.0P	5
SBT50-SPHC16-150	251.8	150	112	38	80	100	23		50	16	75	39	M12*1.0P	4.4
SBT50-SPHC16-200	301.8	200	162	38	130	100	23		50	16	75	39	M12*1.0P	4.6
SBT50-SPHC16-250	351.8	250	212	38	180	100	23		50	16	75	39	M12*1.0P	4.8
SBT50-SPHC16-300	401.8	300	262	38	230	100	23		50	16	75	39	M12*1.0P	5
SBT50-SPHC18-150	251.8	150	112	38	80	100	25		50	18	75	39	M12*1.0P	4.5
SBT50-SPHC18-200	301.8	200	162	38	130	100	25		50	18	75	39	M12*1.0P	4.7
SBT50-SPHC18-250	351.8	250	212	38	180	100	25		50	18	75	39	M12*1.0P	4.9
SBT50-SPHC18-300	401.8	300	262	38	230	100	25		50	18	75	39	M12*1.0P	5.1
SBT50-SPHC20-150	251.8	150	112	38	80	100	27		50	20	75	41	M16*1.0P	4.6
SBT50-SPHC20-200	301.8	200	162	38	130	100	27		50	20	75	41	M16*1.0P	4.8
SBT50-SPHC20-250	351.8	250	212	38	180	100	27		50	20	75	41	M16*1.0P	5
SBT50-SPHC20-300	401.8	300	262	38	230	100	27		50	20	75	41	M16*1.0P	5.2



CNC TOOLS
数控刀柄




数控刀柄系列CNC TOOL SYSTEMS

SBT30/40-SLK 热缩基础柄

SBT30/40-SLK SEMI-FINISHED SHRINK FIT CHUCK



P.129

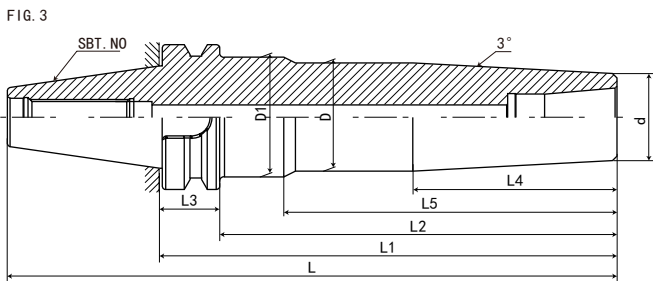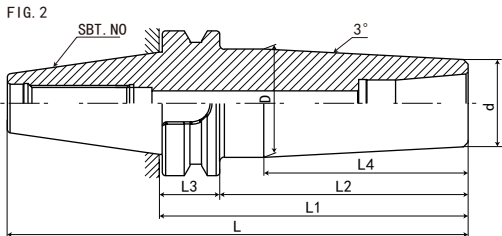

规格 Model	L	L1	L2	L3	L4	L5	D	D1	d	FIG	重量 KGS
SBT30-SLK12-45	93.4	45	24	22	-	-	40	-	38	1	
SBT40-SLK12-45	110.4	45	19	27	-	-	40	-	38	1	1.15
SBT40-SLK12-75	140.4	75	49	27	-	-	42.4	-	38	1	1.45
SBT40-SLK12-135	200.4	135	109	27	89	-	47	-	38	2	2.2
SBT40-SLK12-165	230.4	165	139	27	89	-	47	-	38	2	2.65
SBT40-SLK12-200	265.4	200	174	27	89	145	47	52	38	3	3.25
SBT40-SLK12-220	290.4	225	199	27	89	145	47	52	38	3	





数控刀柄
CNC TOOLS

SBT50-SLK 热缩基础柄

SBT50-SLK SEMI-FINISHED SHRINK FIT CHUCK



P.129

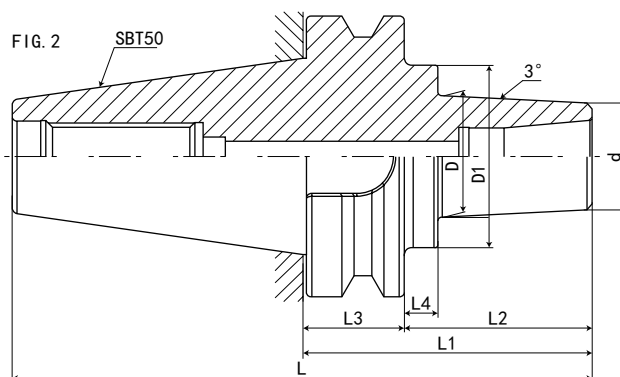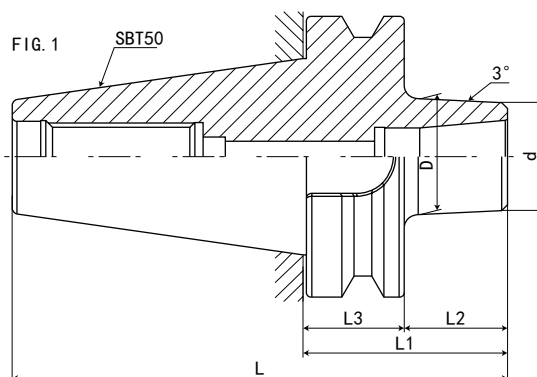

规格 Model	L	L1	L2	L3	L4	D	D1	d	FIG	重量 KGS
SBT50-SLK12-75	176.8	75	37	38	-	41	-	38	1	
SBT50-SLK12-105	206.8	105	67	38	12	43	65	38	2	
SBT50-SLK12-135	236.8	135	97	38	12	46.5	65	38	2	
SBT50-SLK12-225	326.8	225	187	38	12	56	65	38	2	
SBT50-SLK12-265	366.8	265	227	38	12	60	65	38	2	
SBT50-SLK12-315	416.8	315	277	38	12	65.5	65.5	38	2	




CNC TOOLS
数控刀柄

数控刀柄系列CNC TOOL SYSTEMS

SBT-ER 弹性筒夹刀柄

SBT-ER COLLET CHUCK

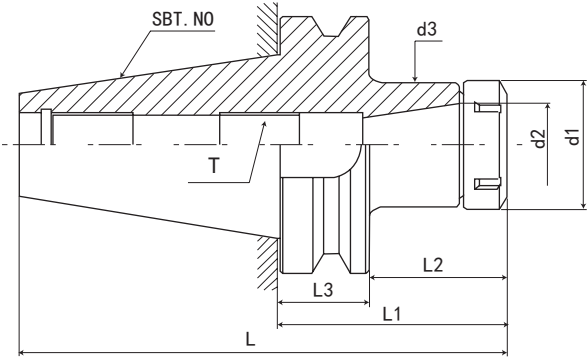

P.131



P.106



P.133




P.129

规格 / 型号 Model	L	L1	L2	L3	d1	d2	d3	T	夹持范围 Range	重量 KGS
SBT30-ER11-70	119.3	70	49	22	16	11	16	M6*1.0P	1-7mm	0.53
SBT30-ER11-100	149.3	100	79	22	16	11	16	M6*1.0P	1-7mm	0.53
SBT30-ER16-70	119.3	70	49	22	28	16	28	M10*1.5P	1-10mm	0.61
SBT30-ER16-100	149.3	100	79	22	28	16	28	M10*1.5P	1-10mm	0.7
SBT30-ER20-70	119.3	70	49	22	34	20	34	M12*1.75P	1-13mm	0.67
SBT30-ER20-100	149.3	100	79	22	34	20	34	M12*1.75P	1-13mm	0.8
SBT30-ER25-70	119.3	70	49	22	42	25	42	M16*2.0P	1-16mm	0.7
SBT30-ER25-100	149.3	100	79	22	42	25	42	M16*2.0P	1-16mm	1
SBT30-ER32-70	119.3	70	49	22	50	32	50	M16*2.0P	1-20mm	0.78
SBT30-ER32-100	149.3	100	79	22	50	32	50	M16*2.0P	1-20mm	1
SBT40-ER11-75	141.4	75	49	27	16	11	16	M6*1.0P	1-7mm	
SBT40-ER11-100	166.4	100	74	27	16	11	16	M6*1.0P	1-7mm	
SBT40-ER16-75	141.4	75	49	27	28	16	28	M10*1.5P	1-10mm	1.3
SBT40-ER16-100	166.4	100	74	27	28	16	28	M10*1.5P	1-10mm	1.3
SBT40-ER16-120	186.4	120	94	27	28	16	28	M10*1.5P	1-10mm	1.42
SBT40-ER16-150	216.4	150	124	27	28	16	28	M10*1.5P	1-10mm	1.6
SBT40-ER20-75	141.4	75	49	27	34	20	34	M12*1.75P	1-13mm	1.2
SBT40-ER20-100	166.4	100	74	27	34	20	34	M12*1.75P	1-13mm	1.4
SBT40-ER20-120	186.4	120	94	27	34	20	34	M12*1.75P	1-13mm	1.52
SBT40-ER20-150	216.4	150	124	27	34	20	34	M12*1.75P	1-13mm	1.7
SBT40-ER25-75	141.4	75	49	27	42	25	42	M16*2.0P	1-16mm	1.3
SBT40-ER25-100	166.4	100	74	27	42	25	42	M16*2.0P	1-16mm	1.6
SBT40-ER25-120	186.4	120	94	27	42	25	42	M16*2.0P	1-16mm	1.78
SBT40-ER25-150	216.4	150	124	27	42	25	42	M16*2.0P	1-16mm	2.05
SBT40-ER32-75	141.4	75	49	27	50	32	50	M16*2.0P	1-20mm	1.47
SBT40-ER32-100	166.4	100	74	27	50	32	50	M16*2.0P	1-20mm	1.7
SBT40-ER32-120	186.4	120	94	27	50	32	50	M16*2.0P	1-20mm	1.98
SBT40-ER32-150	216.4	150	124	27	50	32	50	M16*2.0P	1-20mm	2.4
SBT40-ER32-200	266.4	200	174	27	50	32	50	M16*2.0P	1-20mm	3.15
SBT40-ER40-80	146.4	80	54	27	63	40	63	M20*2.0P	2-26mm	1.5
SBT40-ER40-100	166.4	100	74	27	63	40	63	M20*2.0P	2-26mm	2.1
SBT40-ER40-120	186.4	120	94	27	63	40	63	M20*2.0P	2-26mm	2.54
SBT40-ER40-150	216.4	150	124	27	63	40	63	M20*2.0P	2-26mm	3.2

SBT50-ER 弹性筒夹刀柄

SBT50-ER COLLET CHUCK

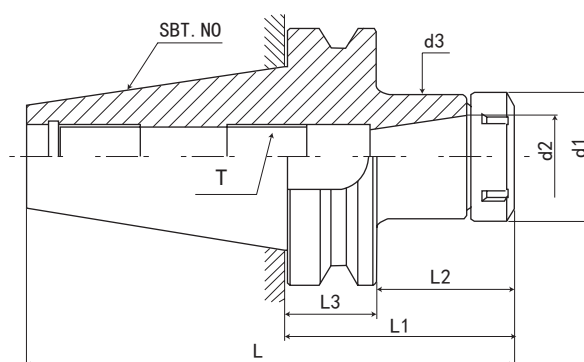

P.I31



P.I06



P.I33



P.I29

规格 / 型号 Model	L	L1	L2	L3	d1	d2	d3	T	夹持范围 Range	重量 KGS
SBT50-ER16-100	203.3	100	63.5	38	28	16	28	M10*1.5P	1-10mm	3.9
SBT50-ER16-135	238.3	135	98.5	38	28	16	28	M10*1.5P	1-10mm	4.04
SBT50-ER16-165	268.3	165	128.5	38	28	16	28	M10*1.5P	1-10mm	4.16
SBT50-ER16-200	303.3	200	163.5	38	28	16	28	M10*1.5P	1-10mm	4.3
SBT50-ER20-100	203.3	100	63.5	38	34	20	34	M12*1.75P	1-13mm	4
SBT50-ER20-135	238.3	135	98.5	38	34	20	34	M12*1.75P	1-13mm	4.21
SBT50-ER20-165	268.3	165	128.5	38	34	20	34	M12*1.75P	1-13mm	4.39
SBT50-ER20-200	303.3	200	163.5	38	34	20	34	M12*1.75P	1-13mm	4.6
SBT50-ER25-100	203.3	100	63.5	38	42	25	42	M16*2.0P	1-16mm	4.1
SBT50-ER25-135	238.3	135	98.5	38	42	25	42	M16*2.0P	1-16mm	4.45
SBT50-ER25-165	268.3	165	128.5	38	42	25	42	M16*2.0P	1-16mm	4.75
SBT50-ER25-200	303.3	200	163.5	38	42	25	42	M16*2.0P	1-16mm	5.1
SBT50-ER25-250	353.3	250	213.5	38	42	25	42	M16*2.0P	1-16mm	5.8
SBT50-ER25-300	403.3	300	263.5	38	42	25	42	M16*2.0P	1-16mm	6.2
SBT50-ER32-100	203.3	100	63.5	38	50	32	50	M16*2.0P	1-20mm	4.2
SBT50-ER32-135	238.3	135	98.5	38	50	32	50	M16*2.0P	1-20mm	4.725
SBT50-ER32-165	268.3	165	128.5	38	50	32	50	M16*2.0P	1-20mm	5.175
SBT50-ER32-200	303.3	200	163.5	38	50	32	50	M16*2.0P	1-20mm	5.7
SBT50-ER32-250	353.3	250	213.5	38	50	32	50	M16*2.0P	1-20mm	6.3
SBT50-ER32-300	403.3	300	263.5	38	50	32	50	M16*2.0P	1-20mm	7.2
SBT50-ER40-100	203.3	100	63.5	38	63	40	63	M20*2.0P	2-26mm	4.5
SBT50-ER40-135	238.3	135	98.5	38	63	40	63	M20*2.0P	2-26mm	5.27
SBT50-ER40-165	268.3	165	128.5	38	63	40	63	M20*2.0P	2-26mm	5.93
SBT50-ER40-200	303.3	200	163.5	38	63	40	63	M20*2.0P	2-26mm	6.7
SBT50-ER40-250	353.3	250	213.5	38	63	40	63	M20*2.0P	2-26mm	7.8
SBT50-ER40-300	403.3	300	263.5	38	63	40	63	M20*2.0P	2-26mm	9
SBT50-ER50-100	203.3	100	63.5	38	78	50	78	M24*2.0P	5-34mm	3.9
SBT50-ER50-150	253.3	150	113.5	38	78	50	78	M24*2.0P	5-34mm	6.2



CNC TOOLS
数控刀柄

数控刀柄系列CNC TOOL SYSTEMS

SBT30-FMH 端面出水铣刀柄

SBT30-FMH FACE MILL HOLDER-COOLANT TYPE



FIG. 1


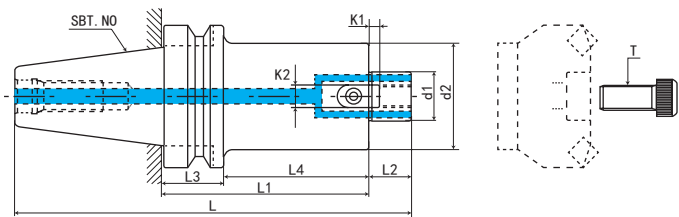



FIG. 2

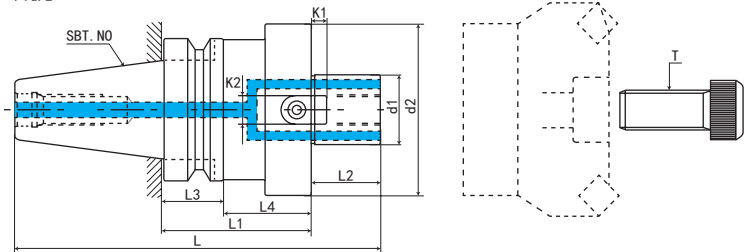

规格 Model	L	L1	L2	L3	L4	d1	d2	K1	K2	T	FIG	重量 KGS
SBT30-FMH16-45-D37	111.3	45	17	22	24	16	37	3.2	8	M8*1.25P	1	
SBT30-FMH16-60-D37	126.3	60	17	22	39	16	37	3.2	8	M8*1.25P	1	0.5
SBT30-FMH22-45-D47	112.3	45	18	22	24	22	47	4.8	10	M10*1.5P	2	0.75
SBT30-FMH22-60-D47	127.3	60	18	22	39	22	47	4.8	10	M10*1.5P	2	1.5
SBT30-FMH27-45-D60	114.3	45	20	22	24	27	60	5.8	12	M12*1.75P	2	1.45
SBT30-FMH27-60-D60	129.3	60	20	22	39	27	60	5.8	12	M12*1.75P	2	1.45
SBT30-FMH32-45-D68	116.3	45	22	22	24	32	68	6.8	14	M16*2.0P	2	1.5
SBT30-FMH32-60-D68	131.3	60	22	22	39	32	68	6.8	14	M16*2.0P	2	1.5
SBT30-FMH25.4-45-D60	114.3	45	20	22	24	25.4	60	4.52	9.52	M12*1.75P	2	1.1
SBT30-FMH25.4-60-D60	129.3	60	20	22	39	25.4	60	4.52	9.52	M12*1.75P	2	1.3
SBT30-FMH31.75-45-D68	116.3	45	22	22	24	31.75	68	6.7	12.7	M16*2.0P	2	1.35
SBT30-FMH31.75-60-D68	131.3	60	22	22	39	31.75	68	6.7	12.7	M16*2.0P	2	1.5

SBT40-FMH 端面出水铣刀柄

SBT40-FMH FACE MILL HOLDER-COOLANT TYPE



P.I29



P.L12

FIG. 1


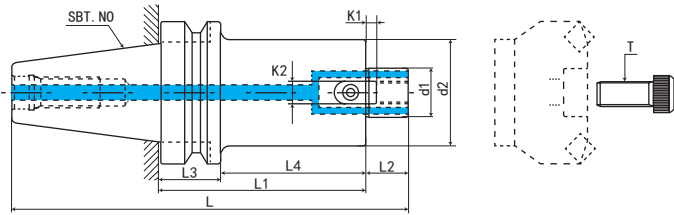


FIG. 2



规格 Model	L	L1	L2	L3	L4	d1	d2	K1	K2	T	FIG	重量 KGS
SBT40-FMH16-60-D37	143.4	60	17	27	34	16	37	3.2	8	M8*1.25P	1	1.3
SBT40-FMH16-100-D37	183.4	100	17	27	74	16	37	3.2	8	M8*1.25P	1	1.4
SBT40-FMH22-45-D47	129.4	45	18	27	19	22	47	4.8	10	M10*1.5P	1	1.29
SBT40-FMH22-60-D47	144.4	60	18	27	34	22	47	4.8	10	M10*1.5P	1	1.5
SBT40-FMH22-100-D47	184.4	100	18	27	74	22	47	4.8	10	M10*1.5P	1	2.05
SBT40-FMH22-150-D47	234.4	150	18	27	124	22	47	4.8	10	M10*1.5P	1	2.75
SBT40-FMH22-200-D47	284.4	200	18	27	174	22	47	4.8	10	M10*1.5P	1	3.6
SBT40-FMH22-250-D47	334.4	250	18	27	224	22	47	4.8	10	M10*1.5P	1	4.25
SBT40-FMH27-45-D60	131.4	45	20	27	19	27	60	5.8	12	M12*1.75P	1	2.23
SBT40-FMH27-60-D60	146.4	60	20	27	34	27	60	5.8	12	M12*1.75P	1	2.35
SBT40-FMH27-100-D60	186.4	100	20	27	74	27	60	5.8	12	M12*1.75P	1	3.1
SBT40-FMH27-150-D60	236.4	150	20	27	124	27	60	5.8	12	M12*1.75P	1	3.9
SBT40-FMH27-200-D60	286.4	200	20	27	174	27	60	5.8	12	M12*1.75P	1	4.8
SBT40-FMH32-45-D68	133.4	45	22	27	19	32	68	6.8	14	M16*2.0P	2	1.78
SBT40-FMH32-60-D68	148.4	60	22	27	34	32	68	6.8	14	M16*2.0P	2	1.9
SBT40-FMH32-100-D68	188.4	100	22	27	74	32	68	6.8	14	M16*2.0P	2	2.8
SBT40-FMH32-150-D68	238.4	150	22	27	124	32	68	6.8	14	M16*2.0P	2	3.6
SBT40-FMH40-45-D78	136.41	45	25	27	19	40	78	8.3	16	M16*2.0P	2	2.605
SBT40-FMH40-60-D78	151.4	60	25	27	34	40	78	8.3	16	M16*2.0P	2	2.8
SBT40-FMH40-100-D78	191.4	100	25	27	74	40	78	8.3	16	M16*2.0P	2	3.6
SBT40-FMH40-150-D78	241.4	150	25	27	124	40	78	8.3	16	M16*2.0P	2	4.9
SBT40-FMH25.4-45-D60	131.4	45	20	27	19	25.4	60	4.52	9.52	M12*1.75P	1	1.395
SBT40-FMH25.4-60-D60	146.4	60	20	27	34	25.4	60	4.52	9.52	M12*1.75P	1	1.5
SBT40-FMH25.4-100-D60	186.4	100	20	27	74	25.4	60	4.52	9.52	M12*1.75P	1	2.05
SBT40-FMH25.4-150-D60	236.4	150	20	27	124	25.4	60	4.52	9.52	M12*1.75P	1	2.75
SBT40-FMH25.4-200-D60	286.4	200	20	27	174	25.4	60	4.52	9.52	M12*1.75P	1	3.6
SBT40-FMH31.75-45-D68	133.4	45	22	27	19	31.75	68	6.7	12.7	M16*2.0P	2	1.87
SBT40-FMH31.75-60-D68	148.4	60	22	27	34	31.75	68	6.7	12.7	M16*2.0P	2	2.05
SBT40-FMH31.75-100-D68	188.4	100	22	27	74	31.75	68	6.7	12.7	M16*2.0P	2	2.9
SBT40-FMH31.75-150-D68	238.4	150	22	27	124	31.75	68	6.7	12.7	M16*2.0P	2	4.1
SBT40-FMH38.1-45-D78	136.4	45	25	27	19	38.1	78	8.87	15.87	M16*2.0P	2	1.78
SBT40-FMH38.1-60-D78	151.4	60	25	27	34	38.1	78	8.87	15.87	M16*2.0P	2	2.1
SBT40-FMH38.1-100-D78	191.4	100	25	27	74	38.1	78	8.87	15.87	M16*2.0P	2	2.95
SBT40-FMH38.1-150-D78	241.4	150	25	27	124	38.1	78	8.87	15.87	M16*2.0P	2	4.02

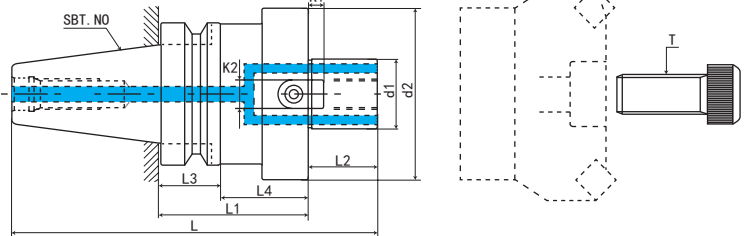


CNC TOOLS
数控刀柄

数控刀柄系列 CNC TOOL SYSTEMS

SBT50-FMH 端面出水铣刀柄

SBT50-FMH FACE MILL HOLDER-COOLANT TYPE

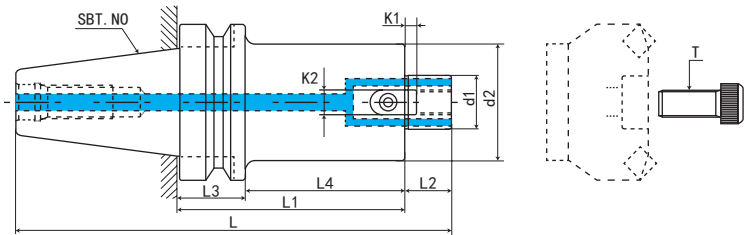

P. I29




P. L12

规格 Model	L	L1	L2	L3	L4	d1	d2	K1	K2	T	重量 KGS
SBT50-FMH16- 60-D37	180.3	60	17	38	23.5	16	37	3.2	8	M8*1.25P	4
SBT50-FMH16-100-D37	220.3	100	17	38	63.5	16	37	3.2	8	M8*1.25P	4.2
SBT50-FMH16-150-D37	270.3	150	17	38	113.5	16	37	3.2	8	M8*1.25P	4.5
SBT50-FMH16-200-D37	320.3	200	17	38	163.5	16	37	3.2	8	M8*1.25P	4.8
SBT50-FMH22- 60-D47	181.3	60	18	38	23.5	22	47	4.8	10	M10*1.5P	4.6
SBT50-FMH22-100-D47	221.3	100	18	38	63.5	22	47	4.8	10	M10*1.5P	4.55
SBT50-FMH22-150-D47	271.3	150	18	38	113.5	22	47	4.8	10	M10*1.5P	5.25
SBT50-FMH22-200-D47	321.3	200	18	38	163.5	22	47	4.8	10	M10*1.5P	6
SBT50-FMH22-250-D47	371.3	250	18	38	213.5	22	47	4.8	10	M10*1.5P	7
SBT50-FMH22-300-D47	421.3	300	18	38	263.5	22	47	4.8	10	M10*1.5P	7.7
SBT50-FMH22-350-D47	471.3	350	18	38	313.5	22	47	4.8	10	M10*1.5P	8.4
SBT50-FMH22-400-D47	521.3	400	18	38	363.5	22	47	4.8	10	M10*1.5P	9.2
SBT50-FMH22-450-D47	571.3	450	18	38	413.5	22	47	4.8	10	M10*1.5P	10
SBT50-FMH22-500-D47	621.3	500	18	38	463.5	22	47	4.8	10	M10*1.5P	11.2
SBT50-FMH22- 60-D60	181.3	60	18	38	23.5	22	60	4.8	10	M10*1.5P	4.4
SBT50-FMH22-100-D60	221.3	100	18	38	63.5	22	60	4.8	10	M10*1.5P	5.2
SBT50-FMH22-150-D60	271.3	150	18	38	113.5	22	60	4.8	10	M10*1.5P	6.3
SBT50-FMH22-200-D60	321.3	200	18	38	163.5	22	60	4.8	10	M10*1.5P	7.2
SBT50-FMH22-250-D60	371.3	250	18	38	213.5	22	60	4.8	10	M10*1.5P	8.3
SBT50-FMH22-300-D60	421.3	300	18	38	263.5	22	60	4.8	10	M10*1.5P	
SBT50-FMH22-350-D60	471.3	350	18	38	313.5	22	60	4.8	10	M10*1.5P	
SBT50-FMH22-400-D60	521.3	400	18	38	363.5	22	60	4.8	10	M10*1.5P	
SBT50-FMH22-450-D60	571.3	450	18	38	413.5	22	60	4.8	10	M10*1.5P	
SBT50-FMH22-500-D60	621.3	500	18	38	463.5	22	60	4.8	10	M10*1.5P	
SBT50-FMH27- 45-D60	168.3	45	20	38	8.5	27	60	5.8	12	M12*1.75P	
SBT50-FMH27- 60-D60	183.3	60	20	38	23.5	27	60	5.8	12	M12*1.75P	4.5
SBT50-FMH27-100-D60	223.3	100	20	38	63.5	27	60	5.8	12	M12*1.75P	5.3
SBT50-FMH27-150-D60	273.3	150	20	38	113.5	27	60	5.8	12	M12*1.75P	6.2
SBT50-FMH27-200-D60	323.3	200	20	38	163.5	27	60	5.8	12	M12*1.75P	7.2
SBT50-FMH27-250-D60	373.3	250	20	38	213.5	27	60	5.8	12	M12*1.75P	8.4
SBT50-FMH27-300-D60	423.3	300	20	38	263.5	27	60	5.8	12	M12*1.75P	
SBT50-FMH27-350-D60	473.3	350	20	38	313.5	27	60	5.8	12	M12*1.75P	
SBT50-FMH27-400-D60	523.3	400	20	38	363.5	27	60	5.8	12	M12*1.75P	
SBT50-FMH27-450-D60	573.3	450	20	38	413.5	27	60	5.8	12	M12*1.75P	
SBT50-FMH27-500-D60	623.3	500	20	38	463.5	27	60	5.8	12	M12*1.75P	

SBT50-FMH 端面出水铣刀柄

SBT50-FMH FACE MILL HOLDER-COOLANT TYPE



P.I29



P.L12

FIG. 1


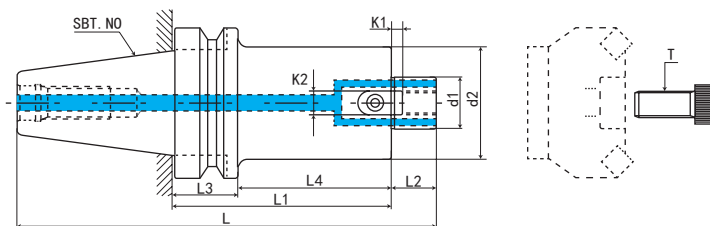


FIG. 2



规格 Model	L	L1	L2	L3	L4	d1	d2	K1	K2	T	FIG	重量 KGS
SBT50-FMH27-45-D76	168.3	45	20	38	8.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-60-D76	183.3	60	20	38	23.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-100-D76	223.3	100	20	38	63.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-150-D76	273.3	150	20	38	113.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-200-D76	323.3	200	20	38	163.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-250-D76	373.3	250	20	38	213.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-300-D76	423.3	300	20	38	263.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-350-D76	473.3	350	20	38	313.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-400-D76	523.3	400	20	38	363.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-450-D76	573.3	450	20	38	413.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH27-500-D76	623.3	500	20	38	463.5	27	76	5.8	12	M12*1.75P	1	
SBT50-FMH32-45-D96	170.3	45	22	38	8.5	32	96	6.8	14	M16*2.0P	1	
SBT50-FMH32-60-D96	185.3	60	22	38	23.5	32	96	6.8	14	M16*2.0P	1	5.3
SBT50-FMH32-100-D96	225.3	100	22	38	63.5	32	96	6.8	14	M16*2.0P	1	7.5
SBT50-FMH32-150-D96	275.3	150	22	38	113.5	32	96	6.8	14	M16*2.0P	1	10.1
SBT50-FMH32-200-D96	325.3	200	22	38	163.5	32	96	6.8	14	M16*2.0P	1	13
SBT50-FMH32-250-D96	375.3	250	22	38	213.5	32	96	6.8	14	M16*2.0P	1	
SBT50-FMH32-300-D96	425.3	300	22	38	263.5	32	96	6.8	14	M16*2.0P	1	
SBT50-FMH32-350-D96	475.3	350	22	38	313.5	32	96	6.8	14	M16*2.0P	1	
SBT50-FMH40-45-D100	173.3	45	25	38	8.5	40	100	8.3	16	M16*2.0P	1	
SBT50-FMH40-60-D100	188.3	60	25	38	23.5	40	100	8.3	16	M16*2.0P	1	5.7
SBT50-FMH40-100-D100	228.3	100	25	38	63.5	40	100	8.3	16	M16*2.0P	1	8.2
SBT50-FMH40-150-D100	278.3	150	25	38	113.5	40	100	8.3	16	M16*2.0P	1	10.8
SBT50-FMH40-200-D100	328.3	200	25	38	163.5	40	100	8.3	16	M16*2.0P	1	13.9
SBT50-FMH40-250-D100	378.3	250	25	38	213.5	40	100	8.3	16	M16*2.0P	1	
SBT50-FMH40-300-D100	428.3	300	25	38	263.5	40	100	8.3	16	M16*2.0P	1	
SBT50-FMH60-75-D128	203.3	75	25	38	38.5	60	128	12.5	25.4	M16*2.0P	2	
SBT50-FMH60-100-D128	228.3	100	25	38	63.5	60	128	12.5	25.4	M16*2.0P	2	
SBT50-FMH60-150-D128	278.3	150	25	38	113.5	60	128	12.5	25.4	M16*2.0P	2	

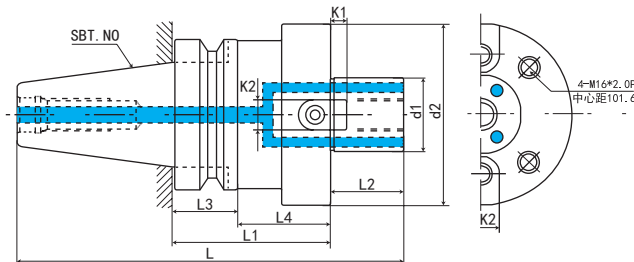

CNC TOOLS
数控刀柄

数控刀柄系列CNC TOOL SYSTEMS

SBT50-FMH 端面出水铣刀柄

SBT50-FMH FACE MILL HOLDER-COOLANT TYPE



P.I29



P.L12

FIG. 1


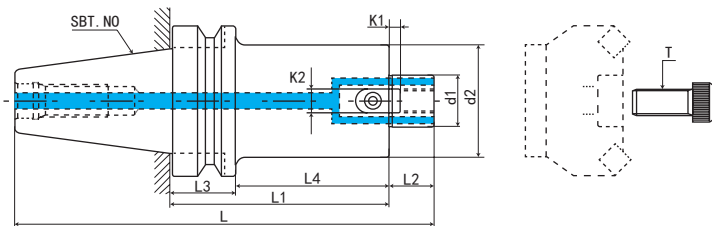


FIG. 2

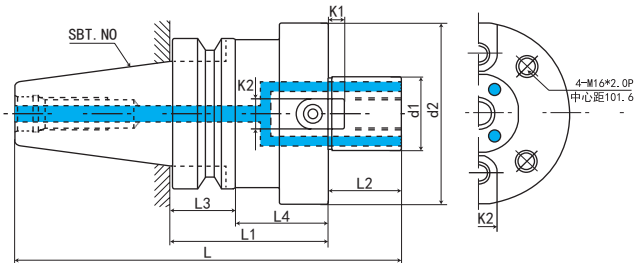

规格 Model	L	L1	L2	L3	L4	d1	d2	K1	K2	T	FIG	重量 KGS
SBT50- FMH25.4-45-D60	168.3	45	20	38	8.5	25.4	60	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-60-D60	183.3	60	20	38	23.5	25.4	60	4.52	9.52	M12*1.75P	1	4.5
SBT50- FMH25.4-100-D60	223.3	100	20	38	63.5	25.4	60	4.52	9.52	M12*1.75P	1	5.3
SBT50- FMH25.4-150-D60	273.3	150	20	38	113.5	25.4	60	4.52	9.52	M12*1.75P	1	6.4
SBT50- FMH25.4-200-D60	323.3	200	20	38	163.5	25.4	60	4.52	9.52	M12*1.75P	1	7.4
SBT50- FMH25.4-250-D60	373.3	250	20	38	213.5	25.4	60	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-300-D60	423.3	300	20	38	263.5	25.4	60	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-45-D76	168.3	45	20	38	8.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-60-D76	183.3	60	20	38	23.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-100-D76	223.3	100	20	38	63.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-150-D76	273.3	150	20	38	113.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-200-D76	323.3	200	20	38	163.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-250-D76	373.3	250	20	38	213.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50- FMH25.4-300-D76	423.3	300	20	38	263.5	25.4	76	4.52	9.52	M12*1.75P	1	
SBT50-FMH31.75-45-D96	170.3	45	22	38	8.5	31.75	96	6.7	12.7	M16*2.0P	1	
SBT50-FMH31.75-60-D96	185.3	60	22	38	23.5	31.75	96	6.7	12.7	M16*2.0P	1	5.3
SBT50-FMH31.75-100-D96	225.3	100	22	38	63.5	31.75	96	6.7	12.7	M16*2.0P	1	7.5
SBT50-FMH31.75-150-D96	275.3	150	22	38	113.5	31.75	96	6.7	12.7	M16*2.0P	1	10.3
SBT50-FMH31.75-200-D96	325.3	200	22	38	163.5	31.75	96	6.7	12.7	M16*2.0P	1	13
SBT50-FMH31.75-250-D96	375.3	250	22	38	213.5	31.75	96	6.7	12.7	M16*2.0P	1	
SBT50-FMH31.75-300-D96	425.3	300	22	38	263.5	31.75	96	6.7	12.7	M16*2.0P	1	
SBT50- FMH38.1-45-D100	173.3	45	25	38	8.5	38.1	100	8.87	15.87	M16*2.0P	1	
SBT50- FMH38.1-60-D100	188.3	60	25	38	23.5	38.1	100	8.87	15.87	M16*2.0P	1	5.6
SBT50- FMH38.1-100-D100	228.3	100	25	38	63.5	38.1	100	8.87	15.87	M16*2.0P	1	8
SBT50- FMH38.1-150-D100	278.3	150	25	38	113.5	38.1	100	8.87	15.87	M16*2.0P	1	
SBT50- FMH38.1-200-D100	328.3	200	25	38	163.5	38.1	100	8.87	15.87	M16*2.0P	1	
SBT50- FMH38.1-250-D100	378.3	250	25	38	213.5	38.1	100	8.87	15.87	M16*2.0P	1	
SBT50- FMH38.1-300-D100	428.3	300	25	38	263.5	38.1	100	8.87	15.87	M16*2.0P	1	
SBT50-FMH47.625-75-D128	203.3	75	25	38	38.5	47.625	128	12.5	25.4	M16*2.0P	2	7.9
SBT50-FMH47.625-100-D128	228.3	100	25	38	63.5	47.625	128	12.5	25.4	M16*2.0P	2	
SBT50-FMH47.625-150-D128	278.3	150	25	38	113.5	47.625	128	12.5	25.4	M16*2.0P	2	

SBT-SLN 侧固式刀柄



SBT-SLN SIDE LOCK END MILL HOLDER



P.129



P.003

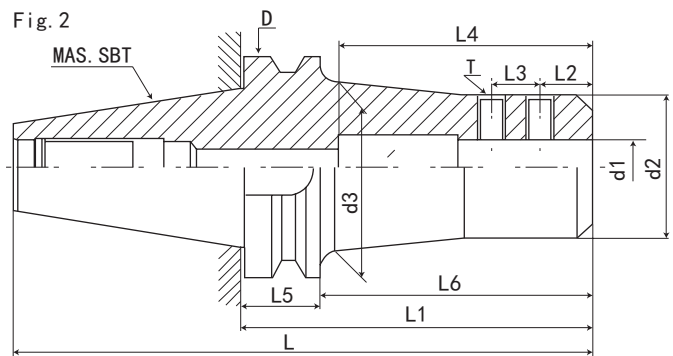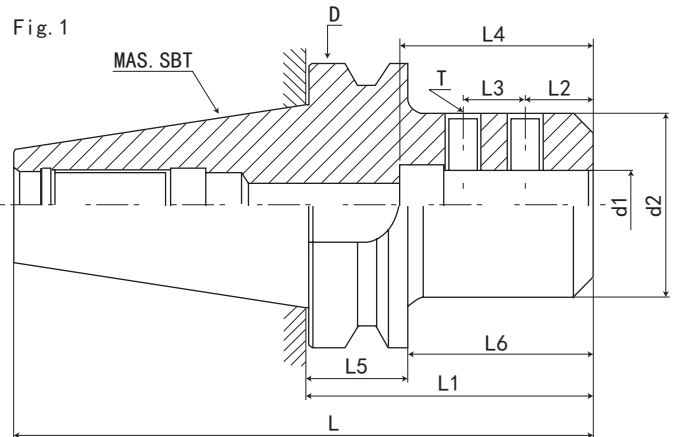

规格 Model	L	L1	L2	L3	L4	L5	L6	d1	d2	d3	FIG	T	重量 KGS
SBT30-SLN16-75	124.3	75	14	14	48	22	54	16	48	-	1	M10*1.5P	1.03
SBT30-SLN20-75	124.3	75	14	14	50	22	54	20	48	-	1	M10*1.5P	0.98
SBT30-SLN25-80	129.3	80	15	20	56	22	59	25	48	-	1	M16*2.0P	0.97
SBT30-SLN32-85	134.3	85	15	20	60	22	59	32	63	-	1	M16*2.0P	1.38
SBT40-SLN16-100	166.4	100	22	18	100	27	74	16	48	-	1	M10*1.5P	2
SBT40-SLN16-150	216.4	150	22	18	100	27	124	16	40	45	2	M10*1.5P	2.2
SBT40-SLN16-200	266.4	200	22	18	100	27	174	16	40	45	2	M10*1.5P	
SBT40-SLN20-100	166.4	100	25	20	110	27	74	20	52	-	1	M12*1.75P	2
SBT40-SLN20-150	216.4	150	25	20	110	27	124	20	45	50	2	M12*1.75P	2.5
SBT40-SLN20-200	266.4	200	25	20	110	27	174	20	45	50	2	M12*1.75P	
SBT40-SLN25-100	166.4	100	24	25	120	27	74	25	65	-	1	M12*1.75P	2.5
SBT40-SLN25-150	216.4	150	24	25	120	27	124	25	50	55	2	M12*1.75P	2.6
SBT40-SLN25-200	266.4	200	24	25	120	27	174	25	50	55	2	M12*1.75P	
SBT40-SLN32-100	166.4	100	24	28	120	27	74	32	65	-	1	M16*2.0P	2.4
SBT40-SLN32-150	216.4	150	24	28	120	27	124	32	58	63	2	M16*2.0P	2.9
SBT40-SLN32-200	266.4	200	24	28	120	27	174	32	58	63	2	M16*2.0P	
SBT40-SLN40-105	171.4	105	30	32	120	27	79	40	73	-	1	M16*2.0P	2.8
SBT40-SLN40-150	216.4	150	30	32	120	27	124	40	73	-	1	M16*2.0P	3.8
SBT40-SLN40-200	266.4	200	30	32	120	27	174	40	73	-	1	M16*2.0P	



CNC TOOLS
数控刀柄

数控刀柄系列 CNC TOOL SYSTEMS

SBT50-SLN 侧固式刀柄



SBT50-SLN SIDE LOCK END MILL HOLDER



P.129



P.003

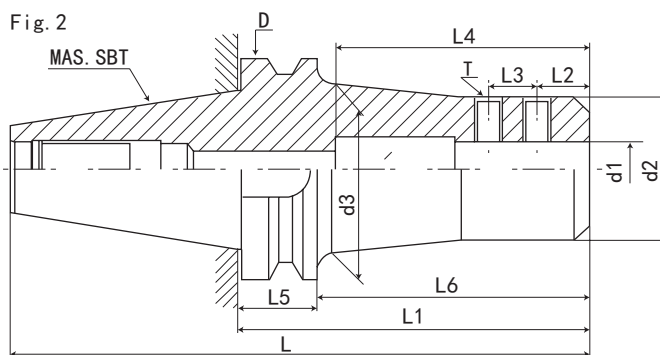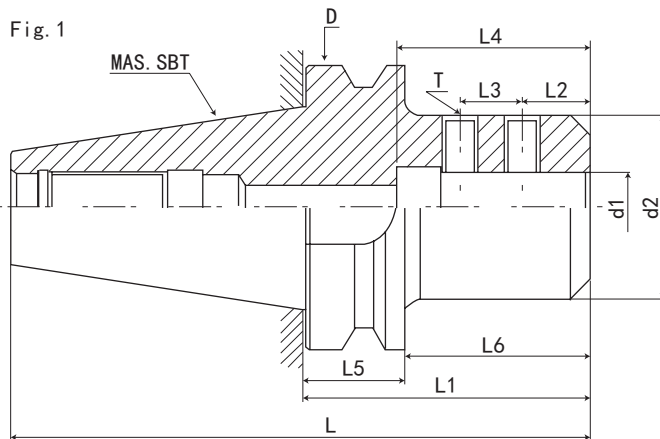

规格 Model	L	L1	L2	L3	L4	L5	L6	d1	d2	d3	FIG	T	重量 KGS
SBT50-SLN16-100	203.3	100	22	18	100	38	63.5	16	48	-	1	M10*1.5P	4.7
SBT50-SLN16-135	238.3	135	22	18	100	38	98.5	16	48	-	1	M10*1.5P	
SBT50-SLN16-165	268.3	165	22	18	100	38	128.5	16	40	45	2	M10*1.5P	
SBT50-SLN16-200	303.3	200	22	18	100	38	163.5	16	40	45	2	M10*1.5P	
SBT50-SLN16-250	353.3	250	22	18	100	38	213.5	16	40	45	2	M10*1.5P	
SBT50-SLN20-100	203.3	100	25	20	110	38	63.5	20	52	-	1	M12*1.75P	4.8
SBT50-SLN20-135	238.3	135	25	20	110	38	98.5	20	52	-	1	M12*1.75P	
SBT50-SLN20-165	268.3	165	25	20	110	38	128.5	20	45	50	2	M12*1.75P	
SBT50-SLN20-200	303.3	200	25	20	110	38	163.5	20	45	50	2	M12*1.75P	
SBT50-SLN20-250	353.3	250	25	20	110	38	213.5	20	45	50	2	M12*1.75P	
SBT50-SLN25-105	208.3	105	24	25	120	38	68.5	25	65	-	1	M12*1.75P	5.4
SBT50-SLN25-135	238.3	135	24	25	120	38	98.5	25	65	-	1	M12*1.75P	
SBT50-SLN25-165	268.3	165	24	25	120	38	128.5	25	50	55	2	M12*1.75P	
SBT50-SLN25-200	303.3	200	24	25	120	38	163.5	25	50	55	2	M12*1.75P	
SBT50-SLN25-250	353.3	250	24	25	120	38	213.5	25	50	55	2	M12*1.75P	
SBT50-SLN25-300	403.3	300	24	25	120	38	263.5	25	50	55	2	M12*1.75P	
SBT50-SLN32-105	208.3	105	24	28	120	38	68.5	32	72	-	1	M16*2.0P	5.5
SBT50-SLN32-135	238.3	135	24	28	120	38	98.5	32	72	-	1	M16*2.0P	
SBT50-SLN32-165	268.3	165	24	28	120	38	128.5	32	60	65	2	M16*2.0P	
SBT50-SLN32-200	303.3	200	24	28	120	38	163.5	32	60	65	2	M16*2.0P	
SBT50-SLN32-250	353.3	250	24	28	120	38	213.5	32	60	65	2	M16*2.0P	
SBT50-SLN32-300	403.3	300	24	28	120	38	263.5	32	60	65	2	M16*2.0P	

SBT50-SLN 侧固式刀柄



SBT50-SLN SIDE LOCK END MILL HOLDER



P.I29



P.O03

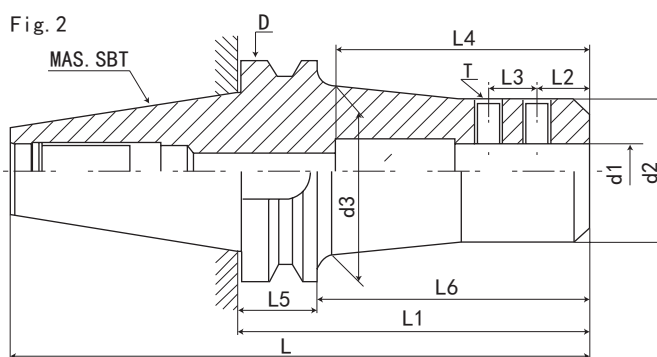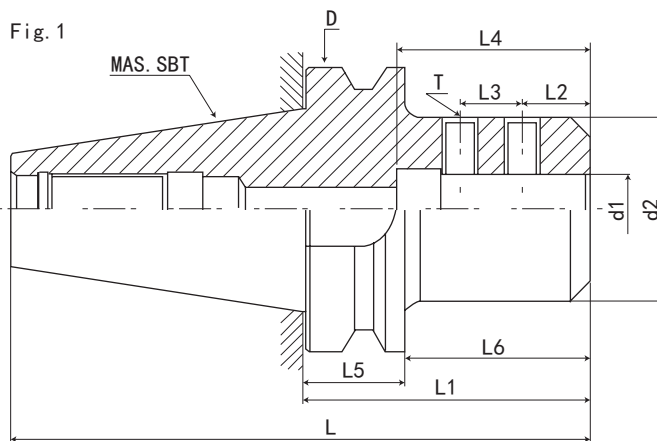

规格 Model	L	L1	L2	L3	L4	L5	L6	d1	d2	d3	FIG	T	重量 KGS
SBT50-SLN40-115	218.3	115	30	32	120	38	78.5	40	80	-	1	M20*2.5P	5.8
SBT50-SLN40-135	238.3	135	30	32	120	38	98.5	40	80	-	1	M20*2.5P	
SBT50-SLN40-165	268.3	165	30	32	120	38	128.5	40	70	75	2	M16*2.0P	
SBT50-SLN40-200	303.3	200	30	32	120	38	163.5	40	70	75	2	M16*2.0P	
SBT50-SLN40-250	353.3	250	30	32	120	38	213.5	40	70	75	2	M16*2.0P	
SBT50-SLN40-300	403.3	300	30	32	120	38	263.5	40	70	75	2	M16*2.0P	
SBT50-SLN42-115	218.3	115	30	32	120	38	78.5	42	80	-	1	M20*2.5P	5.6
SBT50-SLN42-135	238.3	135	30	32	120	38	98.5	42	80	-	1	M20*2.5P	
SBT50-SLN42-165	268.3	165	30	32	120	38	128.5	42	70	75	2	M16*2.0P	
SBT50-SLN42-200	303.3	200	30	32	120	38	163.5	42	70	75	2	M16*2.0P	
SBT50-SLN50-120	221.3	120	35	35	120	38	78.5	50	90	-	1	M20*2.5P	
SBT50-SLN50-150	253.3	150	35	35	120	38	113.5	50	85	90	2	M20*2.5P	
SBT50-SLN50-200	303.3	200	35	35	120	38	163.5	50	85	90	2	M20*2.5P	
SBT50-SLN50.8-120	221.3	120	35	35	120	38	78.5	50.8	90	-	1	M20*2.5P	
SBT50-SLN50.8-150	253.3	150	35	35	120	38	113.5	50.8	85	90	2	M20*2.5P	
SBT50-SLN50.8-200	303.3	200	35	35	120	38	163.5	50.8	85	90	2	M20*2.5P	

数控刀柄系列CNC TOOL SYSTEMS

SBT-CK 镗头刀柄

SBT-CK BORING HEAD SHANK




P.129



P.J39




P.I30

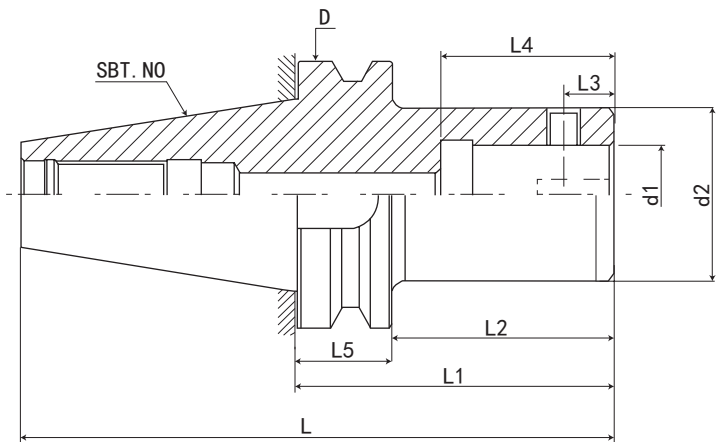


规格 Model	L	L1	L2	L3	L4	L5	d1	d2	D	T	重量 KGS
SBT30-CK1-105	154.3	105	84	5.05	30	22	11	19	46	M4*0.5P	0.51
SBT30-CK2-75	124.3	75	54	6.62	31	22	14	24	46	M5*0.5P	0.44
SBT30-CK2-120	169.3	120	99	6.62	31	22	14	24	46	M5*0.5P	0.57
SBT30-CK3-80	129.3	80	59	8	35	22	18	31	46	M6*0.75P	0.45
SBT30-CK3-120	169.3	120	99	8	35	22	18	31	46	M6*0.75P	0.67
SBT30-CK4-85	134.3	85	64	10	39	22	22	39	46	M8*0.75P	0.46
SBT30-CK4-120	169.3	120	99	10	39	22	22	39	46	M8*0.75P	0.78
SBT30-CK5-85	134.3	85	64	13	45	22	28	50	46	M10*1.0P	0.76
SBT30-CK5-120	169.3	120	99	13	45	22	28	50	46	M10*1.0P	0.8
SBT30-CK6-85	134.3	85	64	16	55	22	36	63	46	M12*1.0P	0.85
SBT30-CK6-135	184.3	135	114	16	55	22	36	63	46	M12*1.0P	0.93
SBT40-CK1-105	171.4	105	79	5.05	30	27	11	19	63	M4*0.5P	
SBT40-CK2-80	146.4	80	54	6.62	31	27	14	24	63	M5*0.5P	
SBT40-CK2-120	186.4	120	94	6.62	31	27	14	24	63	M5*0.5P	
SBT40-CK3-85	151.4	85	59	8	35	27	18	31	63	M6*0.75P	
SBT40-CK3-135	201.4	135	109	8	35	27	18	31	63	M6*0.75P	
SBT40-CK3-165	231.4	165	139	8	35	27	18	31	63	M6*0.75P	
SBT40-CK4-90	156.4	90	64	10	39	27	22	39	63	M8*0.75P	
SBT40-CK4-135	201.4	135	109	10	39	27	22	39	63	M8*0.75P	
SBT40-CK4-165	231.4	165	139	10	39	27	22	39	63	M8*0.75P	
SBT40-CK4-195	261.4	195	169	10	39	27	22	39	63	M8*0.75P	
SBT40-CK5-65	106.4	65	39	13	45	27	28	50	63	M10*1.0P	
SBT40-CK5-105	171.4	105	79	13	45	27	28	50	63	M10*1.0P	
SBT40-CK5-135	201.4	135	109	13	45	27	28	50	63	M10*1.0P	
SBT40-CK5-165	231.4	165	139	13	45	27	28	50	63	M10*1.0P	
SBT40-CK5-195	261.4	195	169	13	45	27	28	50	63	M10*1.0P	
SBT40-CK6-65	131.4	65	39	16	55	27	36	63	63	M12*1.0P	
SBT40-CK6-105	171.4	105	79	16	55	27	36	63	63	M12*1.0P	
SBT40-CK6-135	201.4	135	109	16	55	27	36	63	63	M12*1.0P	
SBT40-CK6-165	231.4	165	139	16	55	27	36	63	63	M12*1.0P	
SBT40-CK6-195	261.4	195	169	16	55	27	36	63	63	M12*1.0P	
SBT40-CK6-245	311.4	245	219	16	55	27	36	63	63	M12*1.0P	

SBT50-CK 镗头刀柄

SBT50-CK BORING HEAD SHANK

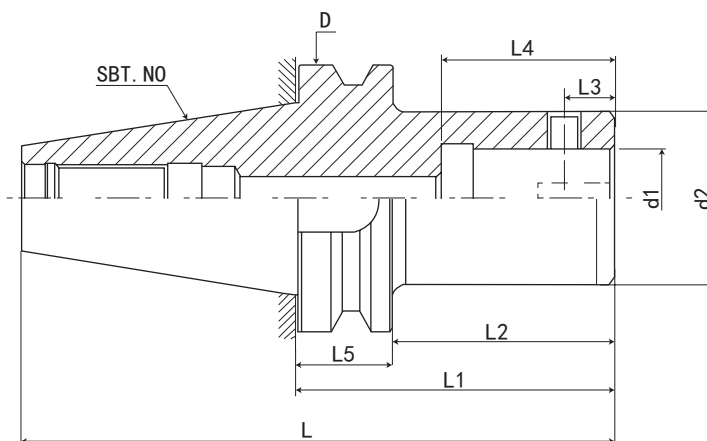

P.I29



P.J39



P.I30

规格 Model	L	L1	L2	L3	L4	L5	d1	d2	D	T	重量 KGS
SBT50-CK1-135	238.3	135	98.5	5.05	30	38	11	19	100	M4*0.5P	4.3
SBT50-CK2-90	193.3	90	53.5	6.62	31	38	14	24	100	M5*0.5P	
SBT50-CK2-115	218.3	115	78.5	6.62	31	38	14	24	100	M5*0.5P	4.1
SBT50-CK2-150	253.3	150	113.5	6.62	31	38	14	24	100	M5*0.5P	4.5
SBT50-CK3-95	198.3	95	58.5	8	35	38	18	31	100	M6*0.75P	
SBT50-CK3-125	228.3	125	88.5	8	35	38	18	31	100	M6*0.75P	4.3
SBT50-CK3-165	268.3	165	128.5	8	35	38	18	31	100	M6*0.75P	4.7
SBT50-CK3-205	308.3	205	168.5	8	35	38	18	31	100	M6*0.75P	4.9
SBT50-CK4-105	208.3	105	68.5	10	39	38	22	39	100	M8*0.75P	
SBT50-CK4-165	268.3	165	128.5	10	39	38	22	39	100	M8*0.75P	5.1
SBT50-CK4-225	328.3	225	188.5	10	39	38	22	39	100	M8*0.75P	
SBT50-CK4-255	358.3	255	218.5	10	39	38	22	39	100	M8*0.75P	5.6
SBT50-CK4-300	403.3	300	263.5	10	39	38	22	39	100	M8*0.75P	
SBT50-CK5-90	193.3	90	53.5	13	45	38	28	50	100	M10*1.0P	
SBT50-CK5-120	223.3	120	83.5	13	45	38	28	50	100	M10*1.0P	
SBT50-CK5-165	268.3	165	128.5	13	45	38	28	50	100	M10*1.0P	5.5
SBT50-CK5-205	308.3	205	168.5	13	45	38	28	50	100	M10*1.0P	5.8
SBT50-CK5-240	343.3	240	203.5	13	45	38	28	50	100	M10*1.0P	
SBT50-CK5-285	388.3	285	248.5	13	45	38	28	50	100	M10*1.0P	
SBT50-CK5-320	423.3	320	283.5	13	45	38	28	50	100	M10*1.0P	
SBT50-CK6-95	198.3	95	58.5	16	55	38	36	63	100	M12*1.0P	4.9
SBT50-CK6-165	268.3	165	128.5	16	55	38	36	63	100	M12*1.0P	
SBT50-CK6-240	343.3	240	203.5	16	55	38	36	63	100	M12*1.0P	
SBT50-CK6-300	403.3	300	263.5	16	55	38	36	63	100	M12*1.0P	9.5
SBT50-CK6-360	463.3	360	323.5	16	55	38	36	63	100	M12*1.0P	10.5
SBT50-CK7-150	253.3	150	113.5	19.1	55	38	46	90	100	M20*1.5P	
SBT50-CK7-210	313.3	210	173.5	19.1	55	38	46	90	100	M20*1.5P	
SBT50-CK7-300	403.3	300	263.5	19.1	55	38	46	90	100	M20*1.5P	
SBT50-CK7-360	463.3	360	323.5	19.1	55	38	46	90	100	M20*1.5P	



CNC TOOLS
数控
刀柄



数控刀柄系列CNC TOOL SYSTEMS

SBT-MTA 带扁尾莫氏刀柄

SBT-MTA TAPER ADAPTER (MORSE)





P.129

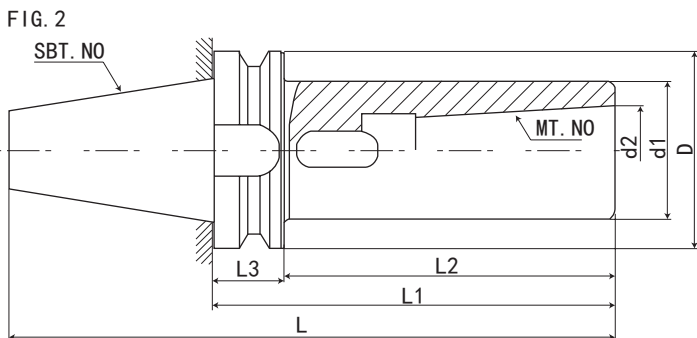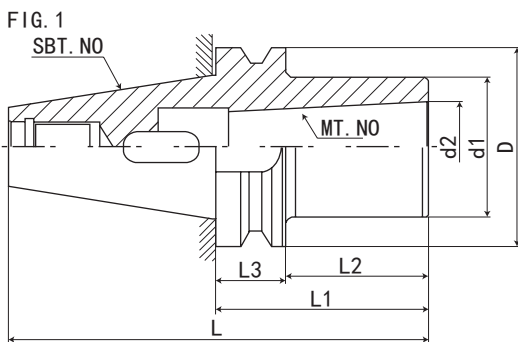

规格 Model	L	L1	L2	L3	D	d1	d2	FIG	夹持范围 Range	重量 KGS
SBT30-MTA1-60	109.3	60	39	22	46	25	12.065	1	Φ2-Φ14	
SBT30-MTA2-60	109.3	60	39	22	46	32	17.18	1	Φ14-Φ23	
SBT30-MTA3-80	129.3	80	59	22	46	40	23.825	1	Φ23-Φ32	
SBT40-MTA1-45	111.4	45	19	27	63	25	12.065	1	Φ2-Φ14	
SBT40-MTA1-120	186.4	120	94	27	63	25	12.065	2	Φ2-Φ14	
SBT40-MTA2-45	111.4	45	19	27	63	32	17.18	1	Φ14-Φ23	
SBT40-MTA2-120	186.4	120	94	27	63	32	17.18	2	Φ14-Φ23	
SBT40-MTA3-75	141.4	75	49	27	63	40	23.825	1	Φ23-Φ32	
SBT40-MTA3-135	201.4	135	109	27	63	40	23.825	2	Φ23-Φ32	
SBT40-MTA4-90	156.4	90	64	27	63	48	31.267	1	Φ32-Φ50	
SBT40-MTA4-180	246.4	180	154	27	63	48	31.267	2	Φ32-Φ50	
SBT50-MTA1-45	148.3	45	8.5	38	100	25	12.065	1	Φ2-Φ14	
SBT50-MTA1-120	223.3	120	83.5	38	100	25	12.065	2	Φ2-Φ14	4.3
SBT50-MTA1-180	283.3	180	143.5	38	100	25	12.065	2	Φ2-Φ14	
SBT50-MTA1-210	313.3	210	173.5	38	100	25	12.065	2	Φ2-Φ14	
SBT50-MTA2-60	163.3	60	23.5	38	100	32	17.18	1	Φ14-Φ23	
SBT50-MTA2-135	238.3	135	98.5	38	100	32	17.18	2	Φ14-Φ23	4.5
SBT50-MTA2-180	283.3	180	143.5	38	100	32	17.18	2	Φ14-Φ23	
SBT50-MTA2-210	313.3	210	173.5	38	100	32	17.18	2	Φ14-Φ23	
SBT50-MTA2-250	353.3	250	213.5	38	100	32	17.18	2	Φ14-Φ23	
SBT50-MTA3-75	178.3	75	38.5	38	100	40	23.825	1	Φ23-Φ32	4.1
SBT50-MTA3-150	253.3	150	113.5	38	100	40	23.825	2	Φ23-Φ32	
SBT50-MTA3-180	283.3	180	143.5	38	100	40	23.825	2	Φ23-Φ32	
SBT50-MTA3-210	313.3	210	173.5	38	100	40	23.825	2	Φ23-Φ32	
SBT50-MTA3-250	353.3	250	213.5	38	100	40	23.825	2	Φ23-Φ32	
SBT50-MTA3-300	403.3	300	263.5	38	100	40	23.825	2	Φ23-Φ32	
SBT50-MTA4-75	178.3	75	38.5	38	100	48	31.267	1	Φ32-Φ50	4
SBT50-MTA4-180	283.3	180	143.5	38	100	48	31.267	2	Φ32-Φ50	
SBT50-MTA4-210	313.3	210	173.5	38	100	48	31.267	2	Φ32-Φ50	
SBT50-MTA4-250	353.3	250	213.5	38	100	48	31.267	2	Φ32-Φ50	
SBT50-MTA4-300	403.3	300	263.5	38	100	48	31.267	2	Φ32-Φ50	
SBT50-MTA5-115	218.3	115	78.5	38	100	65	44.399	1	Φ50-Φ75	
SBT50-MTA5-210	313.3	210	173.5	38	100	66	45.399	2	Φ50-Φ76	
SBT50-MTA5-250	353.3	250	213.5	38	100	67	46.399	2	Φ50-Φ77	
SBT50-MTA6-200	303.3	200	163.5	38	100	85	63.348	1	Φ75-Φ100	
SBT50-MTA6-280	383.3	280	243.5	38	100	85	63.348	2	Φ75-Φ100	

SBT-MTB 无扁尾莫氏刀柄

SBT-MTB MORSE TAP HOLDER

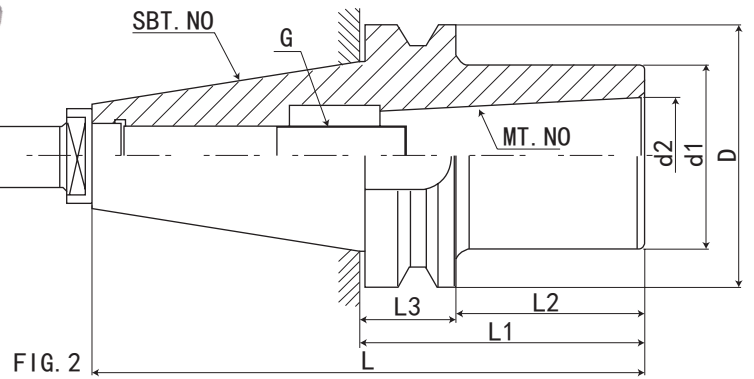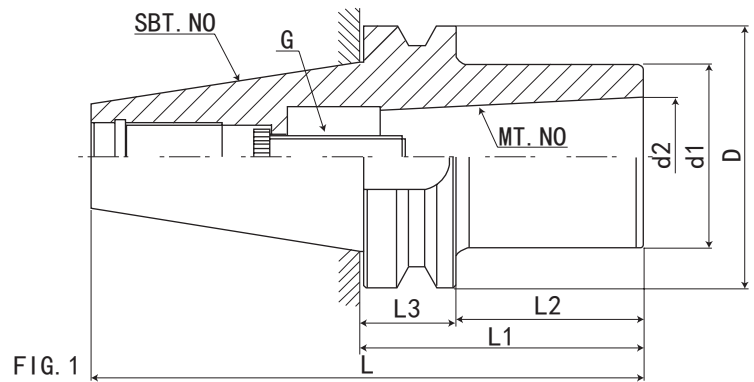

P.129

规格 Model	L	L1	L2	L3	D	d1	d2	FIG	夹持范围 Range	重量 KGS
SBT30-MTB1-60	109.3	60	39	22	46	25	12.065	1	Φ10-Φ14	
SBT30-MTB2-60	109.3	60	39	22	46	32	17.18	1	Φ16-Φ22	
SBT30-MTB3-80	129.3	80	59	22	46	40	23.825	1	Φ24-Φ32	
SBT40-MTB1-45	111.4	45	19	27	63	25	12.065	1	Φ10-Φ14	
SBT40-MTB1-120	186.4	120	94	27	63	25	12.065	2	Φ10-Φ14	
SBT40-MTB2-45	111.4	45	19	27	63	32	17.18	1	Φ16-Φ22	
SBT40-MTB2-120	186.4	120	94	27	63	32	17.18	2	Φ16-Φ22	
SBT40-MTB3-75	141.4	75	49	27	63	40	23.825	1	Φ24-Φ32	
SBT40-MTB3-135	201.4	135	109	27	63	40	23.825	2	Φ24-Φ32	
SBT40-MTB4-90	156.4	90	64	27	63	48	31.267	1	Φ32-Φ50	
SBT40-MTB4-180	246.4	180	154	27	63	48	31.267	2	Φ32-Φ50	
SBT50-MTB1-45	148.3	45	8.5	38	100	25	12.065	1	Φ10-Φ14	
SBT50-MTB1-120	223.3	120	83.5	38	100	25	12.065	2	Φ10-Φ14	
SBT50-MTB2-60	163.3	60	23.5	38	100	32	17.18	1	Φ16-Φ22	
SBT50-MTB2-135	238.3	135	98.5	38	100	32	17.18	2	Φ16-Φ22	
SBT50-MTB3-75	178.3	75	38.5	38	100	40	23.825	1	Φ24-Φ32	
SBT50-MTB3-150	253.3	150	113.5	38	100	40	23.825	2	Φ24-Φ32	
SBT50-MTB4-75	178.3	75	38.5	38	100	48	31.267	1	Φ32-Φ50	
SBT50-MTB4-180	283.3	180	143.5	38	100	48	31.267	2	Φ32-Φ50	
SBT50-MTB5-115	218.3	115	78.5	38	100	65	44.399	1	Φ40-Φ75	
SBT50-MTB5-210	313.3	210	173.5	38	100	66	45.399	2	Φ40-Φ75	





CNC TOOLS
数控刀柄

数控刀柄系列 CNC TOOL SYSTEMS

SBT-APU 一体式钻夹头刀柄

SBT-APU DRILL CHUCK HOLDER

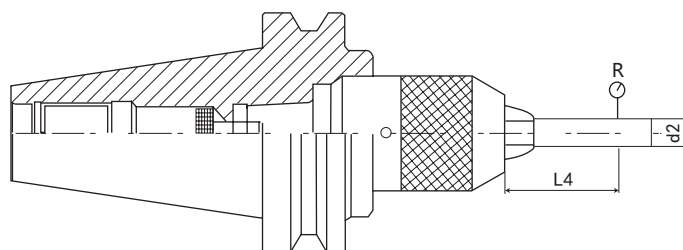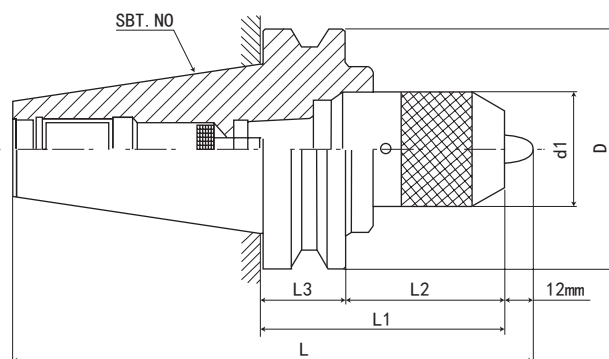

P.I31




P.I29



P.I58

规格 / 型号 Model	L	L1	L2	L3	d1	d2	D	R	夹持范围 Range	重量 KGS
SBT30-APU13-110	159.3	110	89	22	50	13	46	0.08	1-13mm	1.85
SBT30-APU16-115	164.3	115	94	22	57	16	46	0.08	1-16mm	2.18
SBT40-APU13-110	176.4	110	84	27	50	13	63	0.08	1-13mm	2
SBT40-APU16-110	176.4	110	84	27	57	16	63	0.08	1-16mm	2.35
SBT50-APU13-130	233.3	130	93.5	38	50	13	100	0.08	1-13mm	5.5
SBT50-APU13-180	283.3	180	143.5	38	50	13	100	0.08	1-13mm	5.85
SBT50-APU16-130	233.3	130	93.5	38	57	16	100	0.08	1-16mm	5.35
SBT50-APU16-180	283.3	180	143.5	38	57	16	100	0.08	1-16mm	5.85

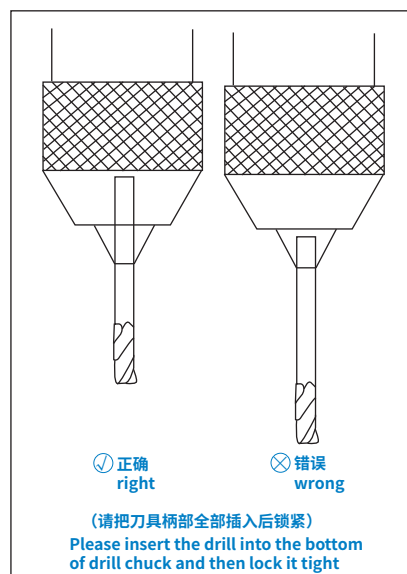

特点:



注:

- ◎ 一体式结构, 减少了连接误差精度, 内部用螺纹结构, 就不会出现夹头脱落现象
- ◎ 用于钻头、铰刀等夹持, 不可用于丝锥和铣刀夹持
- ◎ 一体刀柄缩短刀具长度, 提高加工精度, 增加使用寿命
- ◎ 有自锁功能, 附带专用扳手, 请勿用其它工具
- ◎ APU 偏摆精度为 0.06, 如需更高精度要求请使用 ER 或 SK 系列
- ◎ 扳手、拉钉须另行购买

Features:


- ◎ The shank and keyless drill chuck are combined together so as to avoid the drill chuck slipping out for heavy-duty and high speed cutting and improve the precision.
- ◎ Not be used for gripping draw bolt and milling tools, instead of drill bit and reamer.
- ◎ APU drill chuck shorten the length while length the working life of tool.
- ◎ Each APU drill chuck attached 1pc APU wrench.
- ◎ The APU leaning precision is 0.06mm, like the need high accuracy request, please use ER or the SK serie.
- ◎ The spanner、pull stud must purchase alone.

SBT40 - APU - 13 - 110

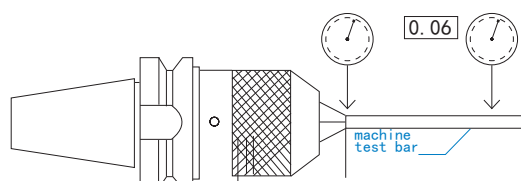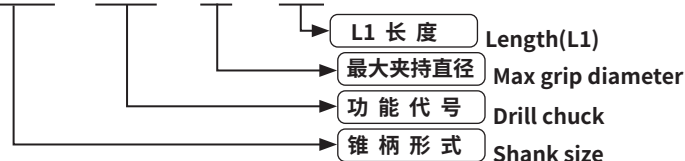


SBT-C 型高精度强力刀柄

SBT-C FORCE MILLING CHUCK

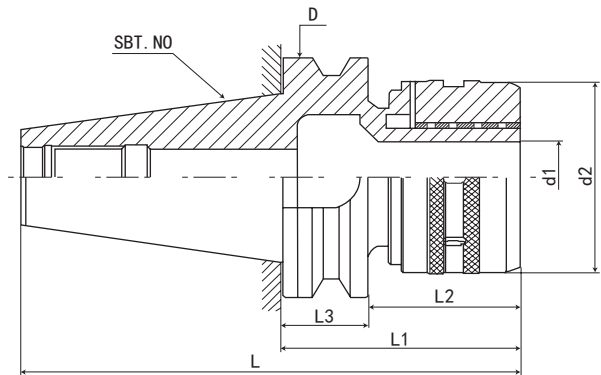

P.131



P.116



P.129

规格 / 型号 Model	L	L1	L2	L3	D	d1	d2	夹持范围 Range
SBT30-C20-80	129.3	80	59	22	46	20	58	3 4 5 6 8 10 12 14 16 20
SBT30-C25-100	149.3	100	79	22	46	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT30-C32-105	154.3	105	84	22	46	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT40-C20-100	166.4	100	74	27	63	20	58	3 4 5 6 8 10 12 14 16 20
SBT40-C25-100	166.4	100	74	27	63	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT40-C25-135	201.4	135	109	27	63	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT40-C32-105	171.4	105	79	27	63	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT40-C32-135	201.4	135	109	27	63	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT40-C32-165	231.4	165	139	27	63	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT40-C32-200	266.4	200	174	27	63	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C25-110	213.3	110	73.5	38	100	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT50-C25-135	238.3	135	98.5	38	100	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT50-C25-165	268.3	165	128.5	38	100	25	63	3 4 5 6 8 10 12 14 16 18 20 25
SBT50-C32-110	213.3	110	73.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C32-135	238.3	135	98.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C32-165	268.3	165	128.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C32-200	303.3	200	163.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C32-250	353.3	250	213.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C32-300	403.3	300	263.5	38	100	32	73	3 4 5 6 8 10 12 14 16 18 20 22 24 25 32
SBT50-C42-135	238.3	135	98.5	38	100	42	88	3 4 5 6 8 10 12 14 16 18 20 22 24 25 28 30 32 34 36 42
SBT50-C42-165	268.3	165	128.5	38	100	42	88	3 4 5 6 8 10 12 14 16 18 20 22 24 25 28 30 32 34 36 42
SBT50-C42-200	303.3	200	163.5	38	100	42	88	3 4 5 6 8 10 12 14 16 18 20 22 24 25 28 30 32 34 36 42

特点:

高速、高精度、高寿命直柄刀具系列

◎材质: 20CrMnTi/15CrMn

◎硬度: HRC58-60, 渗碳深度 > 0.8mm

◎锥柄公差等级: ≤ AT3

◎刀柄内孔分割了六槽, 以防止刀具转动, 增大夹持力

◎采用特殊材料制作滚针轴承保持架, 延长使用寿命, 增强夹紧力

◎具有夹持力大, 定点精度高, 特别适用于强力切削

◎可提供两种外观: 光饰或涂层处理

◎内孔多次研磨, 可达 Ra0.4, 起到镜面效果

◎外圆及端面多次研磨, 可达 Ra0.4, 起到镜面效果

◎表面“环保”特殊涂层处理, 提高表面硬度、耐磨性, 提高清洁度, 精度更稳定, 表面更光滑, 防锈、防腐蚀效果更好, 手感更舒适, 外观更美观

◎扳手、拉钉、筒夹须另行购买

Features:

High speed, high accuracy, high durability C-STRAIGHT TOOL SERIES

◎ Material: 20CrMnTi/15CrMn;

◎ Hardness: HRC58-60, Carbon depth > 0.8 ◎ Tolerance class: ≤ AT3

◎ Inner hole of the shank divide into 6 troughs to prevent the insert remove, increase the grasp force

◎ Ball bearing cage is made of special material, improve the endurance, enhance the grasp force

◎ Grasp force strong, centering accuracy high, suit to heavy cutting

◎ Two kinds looks provide: polishing or chemical nickel-plating processing;


◎ Inner hole grinding for many times, so as to reach Ra0.4, has a mirror effect;

◎ End and the cylindrical are grinding for many times, can reach Ra0.4, has a mirror effect;

◎ Surface "environmental protection", special coating surface treatment, improve the hardness and endurance of the surface, cleanliness better, accuracy stable, surface more smooth, antirust, feel comfortable, appearance nice.

◎ The spanner, pull stud chuck must purchase alone.

SBT30 - C20 - 80

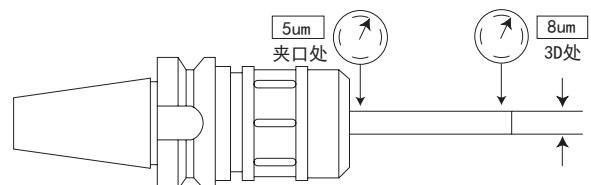


数控刀柄系列 CNC TOOL SYSTEMS

SBT-SLD 小径侧固刀柄

SBT-SLD SMALL DIAMETER SIDE LOCK TOOL HOLDER



P.129

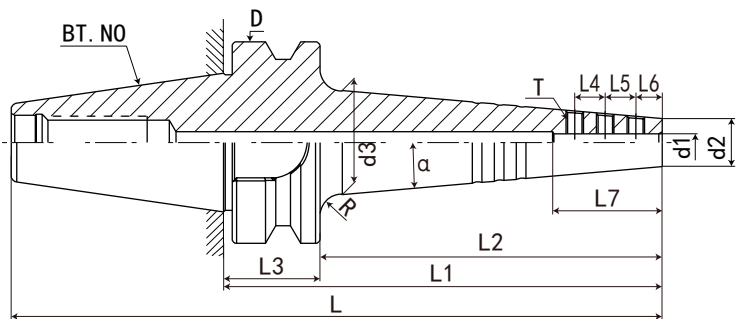

规格 Model	L	L1	L2	L3	L4	L5	L6	L7	D	d1	d2	d3	T	α	R	重量 KGS
SBT30-SLD3-80-A5	128.4	80	58	22	6	6	6	18	46	3	9	18.5	M3.5*3*0.35P*T6	5°	5	
SBT30-SLD3-100-A5	148.4	100	78	22	6	6	6	18	46	3	9	22	M3.5*3*0.35P*T6	5°	5	
SBT30-SLD4-80-A5	128.4	80	58	22	7	7	6	20	46	4	11	20.5	M4*2.8*0.5P*H2	5°	5	
SBT30-SLD4-100-A5	148.4	100	78	22	7	7	6	20	46	4	11	24	M4*2.8*0.5P*H2	5°	5	
SBT30-SLD6-80-A5	128.4	80	58	22	8	8	6	22	46	6	13	22.5	M5*4*0.5P*H2.5	5°	5	
SBT30-SLD6-100-A5	148.4	100	78	22	8	8	6	22	46	6	13	25.5	M5*4*0.5P*H2.5	5°	5	
SBT30-SLD8-80-A5	128.4	80	58	22	10	10	7	27	46	8	15	24.5	M5*4*0.5P*H2.5	5°	5	
SBT30-SLD8-100-A5	148.4	100	78	22	10	10	7	27	46	8	15	28	M5*4*0.5P*H2.5	5°	5	

SLD 侧固式刀柄延长杆专用螺丝


SLD side fixed extension rod special screw

规格 Model	使用孔径 D Using aperture
M3.5×3×P0.35×T6	D3
M4×2.8×P0.5×T8	D4
M4×4×P0.5×T8	D4
M5×3.5×P0.5×T10	D6
M5×5×P0.5×T10	D6 D8 D10
M6×4×P0.75×T15	D12
M6×6×P0.75×T15	D12
M8×5×P0.75×L4	D16 D20
M4×2.8×P0.5×H2	D4
M5×4×P0.5×H2.5	D6 D8 D10
M6×4×P0.75×H3	D12
M6×5×P0.75×H3	D12

备注：梅花扳手“T”，六角扳手“H”


六角扳手：更大的锁紧力（需注意控制尺寸）

梅花扳手：使用更方便

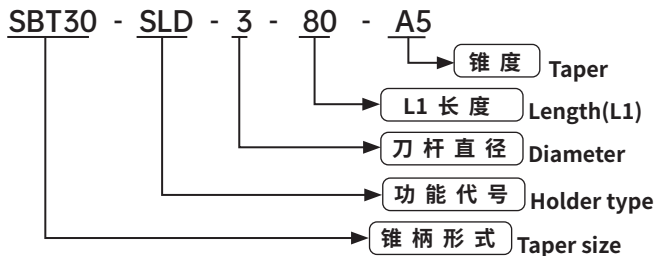

SBT40-SLD 小径侧固刀柄

SBT40-SLD SMALL DIAMETER SIDE LOCK TOOL HOLDER

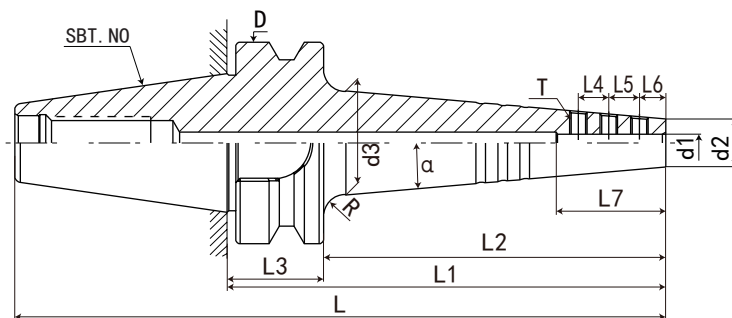


规格 Model	L	L1	L2	L3	L4	L5	L6	L7	D	d1	d2	d3	T	α	R	重量 KGS
SBT40-SLD3-135-A5	200.4	135	108	27	6	6	6	18	63	3	9	27	M3.5*3*0.35P*T6	5°	5	
SBT40-SLD4-135-A5	200.4	135	108	27	7	7	6	20	63	4	11	29	M4*2.8*0.5P*H2	5°	5	
SBT40-SLD6-135-A5	200.4	135	108	27	8	8	6	22	63	6	13	31	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD6-150-A5	215.4	150	123	27	8	8	6	22	63	6	13	33.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD6-200-A5	265.4	200	173	27	8	8	6	22	63	6	13	41.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD8-135-A5	200.4	135	108	27	10	10	7	27	63	8	15	33	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD8-150-A5	215.4	150	123	27	10	10	7	27	63	8	15	35.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD8-200-A5	265.4	200	173	27	10	10	7	27	63	8	15	43.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD10-135-A5	200.4	135	108	27	10	10	10	35	63	10	17	35	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD10-150-A5	215.4	150	123	27	10	10	10	35	63	10	17	37.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD10-200-A5	265.4	200	173	27	10	10	10	35	63	10	17	45.5	M5*4*0.5P*H2.5	5°	5	
SBT40-SLD12-135-A5	200.4	135	108	27	10	10	10	45	63	12	22	40	M6*5*0.75P*H3	5°	5	
SBT40-SLD12-150-A5	215.4	150	123	27	10	10	10	45	63	12	22	42.5	M6*5*0.75P*H3	5°	5	
SBT40-SLD12-200-A5	265.4	200	173	27	10	10	10	45	63	12	22	50.5	M6*5*0.75P*H3	5°	5	
SBT40-SLD6-150-A3	215.4	150	123	27	8	8	6	22	63	6	13	25.5	M5*4*0.5P*H2.5	3°	5	
SBT40-SLD6-200-A3	265.4	200	173	27	8	8	6	22	63	6	13	30.5	M5*4*0.5P*H2.5	3°	5	
SBT40-SLD8-150-A3	215.4	150	123	27	10	10	7	27	63	8	15	27.5	M5*4*0.5P*H2.5	3°	5	
SBT40-SLD8-200-A3	265.4	200	173	27	10	10	7	27	63	8	15	32.5	M5*4*0.5P*H2.5	3°	5	
SBT40-SLD10-150-A3	215.4	150	123	27	10	10	10	35	63	10	17	29.5	M5*4*0.5P*H2.5	3°	5	
SBT40-SLD10-200-A3	265.4	200	173	27	10	10	10	35	63	10	17	34.5	M5*4*0.5P*H2.5	3°	5	

SLD 侧固式刀柄延长杆专用螺丝：

SLD side fixed extension rod special screw

规格 Model	使用孔径 D Using aperture
M3.5×3×P0.35×T6	D3
M4×2.8×P0.5×T8	D4
M4×4×P0.5×T8	D4
M5×3.5×P0.5×T10	D6
M5×5×P0.5×T10	D6 D8 D10
M6×4×P0.75×T15	D12
M6×6×P0.75×T15	D12
M8×5×P0.75×L4	D16 D20
M4×2.8×P0.5×H2	D4
M5×4×P0.5×H2.5	D6 D8 D10
M6×4×P0.75×H3	D12
M6×5×P0.75×H3	D12

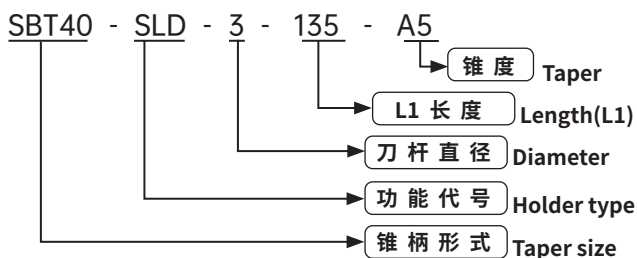

备注：梅花扳手“T”，六角扳手“H”

六角扳手：更大的锁紧力（需注意控制尺寸）

梅花扳手：使用更方便


数控刀柄系列 CNC TOOL SYSTEMS

SBT50-SLD 小径侧固刀柄

SBT50-SLD SMALL DIAMETER SIDE LOCK TOOL HOLDER



P.129

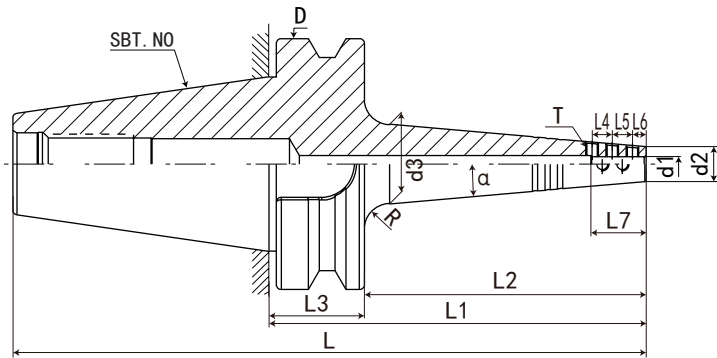


规格 Model	L	L1	L2	L3	L4	L5	L6	L7	D	d1	d2	d3	T	α	R	重量 KGS
SBT50-SLD4-150-A5	251.8	150	112	38	7	7	6	20	100	4	12	30	M4*2.8*0.5P*H2	5°	10	
SBT50-SLD4-200-A5	301.8	200	162	38	7	7	6	20	100	4	12	38.5	M4*2.8*0.5P*H2	5°	10	
SBT50-SLD4-250-A5	351.8	250	212	38	7	7	6	20	100	4	12	47.5	M4*2.8*0.5P*H2	5°	10	
SBT50-SLD4-300-A5	401.8	300	262	38	7	7	6	20	100	4	12	56	M4*2.8*0.5P*H2	5°	10	
SBT50-SLD6-150-A5	251.8	150	112	38	8	8	6	22	100	6	14	32	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD6-200-A5	301.8	200	162	38	8	8	6	22	100	6	14	40.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD6-250-A5	351.8	250	212	38	8	8	6	22	100	6	14	49.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD6-300-A5	401.8	300	262	38	8	8	6	22	100	6	14	58	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD8-150-A5	251.8	150	112	38	10	10	7	27	100	8	16	34	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD8-200-A5	301.8	200	162	38	10	10	7	27	100	8	16	42.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD8-250-A5	351.8	250	212	38	10	10	7	27	100	8	16	51.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD8-300-A5	401.8	300	262	38	10	10	7	27	100	8	16	60	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD10-150-A5	251.8	150	112	38	10	10	10	35	100	10	18	36	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD10-200-A5	301.8	200	162	38	10	10	10	35	100	10	18	44.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD10-250-A5	351.8	250	212	38	10	10	10	35	100	10	18	53.5	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD10-300-A5	401.8	300	262	38	10	10	10	35	100	10	18	62	M5*4*0.5P*H2.5	5°	10	
SBT50-SLD12-150-A5	251.8	150	112	38	10	10	10	45	100	12	22	40	M6*5*0.75P*H3	5°	10	
SBT50-SLD12-200-A5	301.8	200	162	38	10	10	10	45	100	12	22	48.5	M6*5*0.75P*H3	5°	10	
SBT50-SLD12-250-A5	351.8	250	212	38	10	10	10	45	100	12	22	57.5	M6*5*0.75P*H3	5°	10	
SBT50-SLD12-300-A5	401.8	300	262	38	10	10	10	45	100	12	22	66	M6*5*0.75P*H3	5°	10	
SBT50-SLD16-150-A5	251.8	150	112	38	12	12	10	50	100	16	26	44	M8*5*0.75P*L4	5°	10	
SBT50-SLD16-200-A5	301.8	200	162	38	12	12	10	50	100	16	26	52.5	M8*5*0.75P*L4	5°	10	
SBT50-SLD16-250-A5	351.8	250	212	38	12	12	10	50	100	16	26	61.5	M8*5*0.75P*L4	5°	10	
SBT50-SLD16-300-A5	401.8	300	262	38	12	12	10	50	100	16	26	70	M8*5*0.75P*L4	5°	10	
SBT50-SLD20-150-A5	251.8	150	112	38	12	12	10	55	100	20	30	48	M8*5*0.75P*L4	5°	10	
SBT50-SLD20-200-A5	301.8	200	162	38	12	12	10	55	100	20	30	56.5	M8*5*0.75P*L4	5°	10	
SBT50-SLD20-250-A5	351.8	250	212	38	12	12	10	55	100	20	30	65.5	M8*5*0.75P*L4	5°	10	
SBT50-SLD20-300-A5	401.8	300	262	38	12	12	10	55	100	20	30	74	M8*5*0.75P*L4	5°	10	

SLD 侧固式刀柄延长杆专用螺丝：

SLD side fixed extension rod special screw

规格 Model	使用孔径 D Using aperture
M3.5×3×P0.35×T6	D3
M4×2.8×P0.5×T8	D4
M4×4×P0.5×T8	D4
M5×3.5×P0.5×T10	D6
M5×5×P0.5×T10	D6 D8 D10
M6×4×P0.75×T15	D12
M6×6×P0.75×T15	D12
M8×5×P0.75×L4	D16 D20
M4×2.8×P0.5×H2	D4
M5×4×P0.5×H2.5	D6 D8 D10
M6×4×P0.75×H3	D12
M6×5×P0.75×H3	D12

SBT50 - SLD - 4 - 150 - A5

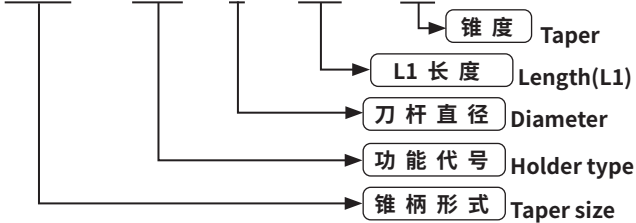


备注：梅花扳手“T”，六角扳手“H”
六角扳手：更大的锁紧力（需注意控制尺寸）
梅花扳手：使用更方便

SBT50-SLD 小径侧固刀柄

SBT50-SLD SMALL DIAMETER SIDE LOCK TOOL HOLDER



P.129

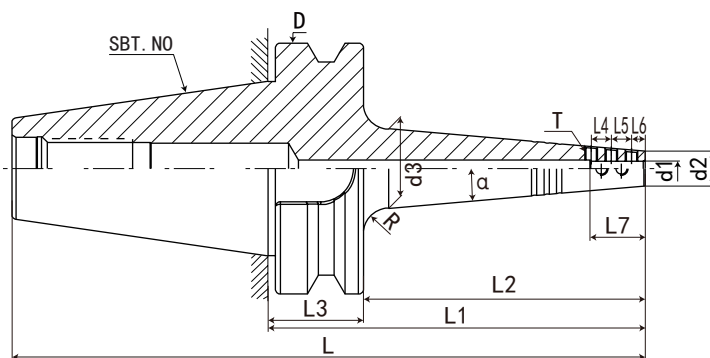


规格 Model	L	L1	L2	L3	L4	L5	L6	L7	D	d1	d2	d3	T	α	R	重量 KGS
SBT50-SLD6-150-A3	251.8	150	112	38	8	8	6	22	100	6	14	25	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD6-200-A3	301.8	200	162	38	8	8	6	22	100	6	14	30	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD6-250-A3	351.8	250	212	38	8	8	6	22	100	6	14	35	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD6-300-A3	401.8	300	262	38	8	8	6	22	100	6	14	40	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD8-150-A3	251.8	150	112	38	10	10	7	27	100	8	16	27	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD8-200-A3	301.8	200	162	38	10	10	7	27	100	8	16	32	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD8-250-A3	351.8	250	212	38	10	10	7	27	100	8	16	37	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD8-300-A3	401.8	300	262	38	10	10	7	27	100	8	16	42	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD10-150-A3	251.8	150	112	38	10	10	10	35	100	10	18	29	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD10-200-A3	301.8	200	162	38	10	10	10	35	100	10	18	34	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD10-250-A3	351.8	250	212	38	10	10	10	35	100	10	18	39	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD10-300-A3	401.8	300	262	38	10	10	10	35	100	10	18	44	M5*4*0.5P*H2.5	3°	10	
SBT50-SLD12-150-A3	251.8	150	112	38	10	10	10	45	100	12	22	33	M6*5*0.75P*H3	3°	10	
SBT50-SLD12-200-A3	301.8	200	162	38	10	10	10	45	100	12	22	38	M6*5*0.75P*H3	3°	10	
SBT50-SLD12-250-A3	351.8	250	212	38	10	10	10	45	100	12	22	43	M6*5*0.75P*H3	3°	10	
SBT50-SLD12-300-A3	401.8	300	262	38	10	10	10	45	100	12	22	48	M6*5*0.75P*H3	3°	10	

SLD 侧固式刀柄延长杆专用螺丝：

SLD side fixed extension rod special screw

规格 Model	使用孔径 D Using aperture
M3.5×3×P0.35×T6	D3
M4×2.8×P0.5×T8	D4
M4×4×P0.5×T8	D4
M5×3.5×P0.5×T10	D6
M5×5×P0.5×T10	D6 D8 D10
M6×4×P0.75×T15	D12
M6×6×P0.75×T15	D12
M8×5×P0.75×L4	D16 D20
M4×2.8×P0.5×H2	D4
M5×4×P0.5×H2.5	D6 D8 D10
M6×4×P0.75×H3	D12
M6×5×P0.75×H3	D12

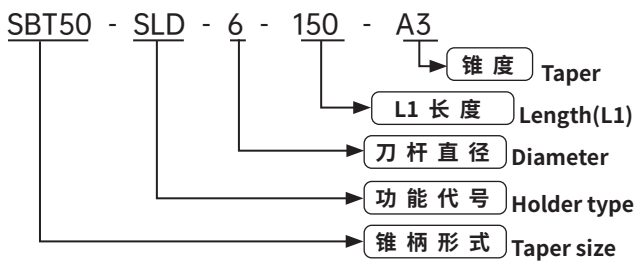

CNC TOOLS
数控刀柄

备注：梅花扳手“T”，六角扳手“H”

六角扳手：更大的锁紧力（需注意控制尺寸）

梅花扳手：使用更方便


数控刀柄系列CNC TOOL SYSTEMS

SBT-SCA 侧铣刀柄

SBT-SCA SIDE CUTTER ADAPTET



P.129

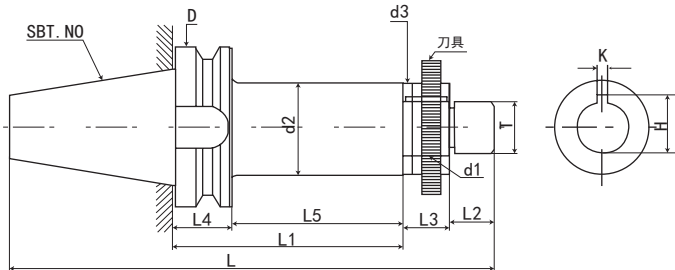

规格 / 型号 Model	L	L1	L2	L3	L4	L5	D	d1	d2	d3	k	H	T	重量 KGS
SBT30-SCA10-60	109.3	60	12	30	22	39	46	10	18	18	-	-	M8*1.25P	0.8
SBT30-SCA16-60	109.3	60	16	30	22	39	46	16	26	26	4	17.7	M14*1.5P	1
SBT30-SCA22-60	109.3	60	22	30	22	39	46	22	34	34	6	24.3	M20*1.5P	1.2
SBT30-SCA27-75	124.3	75	28	30	22	54	46	27	41	41	7	30	M24*1.5P	1.4
SBT40-SCA16-60	172.4	60	16	30	27	34	63	16	26	26	4	17.7	M14*1.5P	1.5
SBT40-SCA22-75	193.4	75	22	30	27	49	63	22	34	34	6	24.3	M20*1.5P	1.6
SBT40-SCA22-120	238.4	120	22	30	27	94	63	22	34	34	6	24.3	M20*1.5P	1.7
SBT40-SCA27-75	199.4	75	28	30	27	49	63	27	41	41	7	30	M24*1.5P	2
SBT40-SCA27-120	244.4	120	28	30	27	94	63	27	41	41	7	30	M24*1.5P	2.1
SBT40-SCA32-90	218.4	90	32	30	27	64	63	32	47	47	8	35	M30*1.5P	2.5
SBT40-SCA32-180	308.4	180	32	30	27	154	63	32	47	47	8	35	M30*1.5P	2.6
SBT50-SCA22-90	245.3	90	22	30	38	53.5	100	22	34	34	6	24.3	M20*1.5P	1.7
SBT50-SCA22-135	290.3	135	22	30	38	98.5	100	22	34	34	6	24.3	M20*1.5P	2
SBT50-SCA27-90	251.3	90	28	30	38	53.5	100	27	41	41	7	30	M24*1.5P	2
SBT50-SCA27-135	296.3	135	28	30	38	98.5	100	27	41	41	7	30	M24*1.5P	2.4
SBT50-SCA32-90	255.3	90	32	30	38	53.5	100	32	47	47	8	35	M30*1.5P	2.6
SBT50-SCA32-135	300.3	135	32	30	38	98.5	100	32	47	47	8	35	M30*1.5P	4.4
SBT50-SCA40-90	263.3	90	40	30	38	53.5	100	40	55	55	10	43.7	M36*2.0P	4.7
SBT50-SCA40-135	308.3	135	40	30	38	98.5	100	40	55	55	10	43.7	M36*2.0P	5

特点:

注:

- ◎ 割槽刀，三面刃铣刀等使用时，为使用刀具与刀杆紧密接触，请调整垫片
- ◎ 选购刀柄，根据加工需要请确认装锯片卡位大小。不附带拉钉
- ◎ 拉钉须另行购买

Features:

- ◎ Shears the trough knife, when uses and so on three edge milling cutters, is uses the cutting tool and the cutter bar contacts closely, requests transfer the entire filling piece.
- ◎ Selects and purchases the hilt, according to the processing needs please to confirm that installs the saw blade jamming size. Does not supplement the puller bolt to select.
- ◎ The pull stud must purchase alone.

SBT-M 螺纹连接刀柄 (直柄)


SBT-M THERADED CHUCK



P.129



P.M21

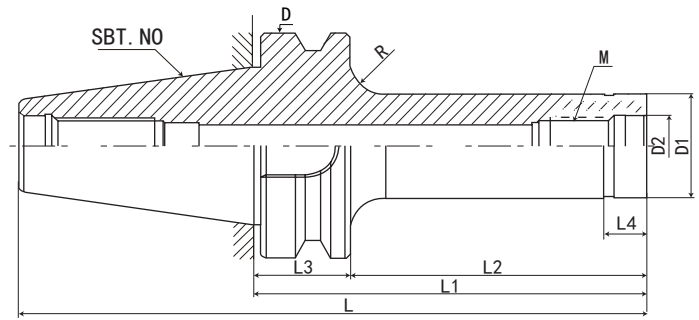

规格 Model	L	L1	L2	L3	L4	D	D1	D2	M	R	重量 KGS
SBT30-M08-60	108.4	60	38	22	12	46	15.4	8.5	M8*1.25P	4	
SBT30-M08-90	138.4	90	68	22	12	46	15.4	8.5	M8*1.25P	4	0.5
SBT30-M08-110	158.4	110	88	22	12	46	15.4	8.5	M8*1.25P	4	
SBT30-M10-60	108.4	60	38	22	12	46	19	10.5	M10*1.5P	4	
SBT30-M10-90	138.4	90	68	22	12	46	19	10.5	M10*1.5P	4	0.5
SBT30-M10-110	158.4	110	88	22	12	46	19	10.5	M10*1.5P	4	
SBT30-M12-60	108.4	60	38	22	12	46	24	12.5	M12*1.75P	4	
SBT30-M12-90	138.4	90	68	22	12	46	24	12.5	M12*1.75P	4	0.6
SBT30-M12-110	158.4	110	88	22	12	46	24	12.5	M12*1.75P	4	
SBT30-M16-60	108.4	60	38	22	12	46	29	17	M16*2.0P	4	
SBT30-M16-90	138.4	90	68	22	12	46	29	17	M16*2.0P	4	0.7
SBT30-M16-110	158.4	110	88	22	12	46	29	17	M16*2.0P	4	
SBT40-M08-60	125.4	60	33	27	12	63	15.4	8.5	M8*1.25P	10	1.1
SBT40-M08-90	155.4	90	63	27	12	63	15.4	8.5	M8*1.25P	10	1.2
SBT40-M08-110	175.4	110	83	27	12	63	15.4	8.5	M8*1.25P	10	1.2
SBT40-M10-60	125.4	60	33	27	12	63	19	10.5	M10*1.5P	10	1.1
SBT40-M10-90	155.4	90	63	27	12	63	19	10.5	M10*1.5P	10	1.1
SBT40-M10-110	175.4	110	83	27	12	63	19	10.5	M10*1.5P	10	1.2
SBT40-M12-60	125.4	60	33	27	12	63	24	12.5	M12*1.75P	10	1.2
SBT40-M12-90	155.4	90	63	27	12	63	24	12.5	M12*1.75P	10	1.3
SBT40-M12-110	175.4	110	83	27	12	63	24	12.5	M12*1.75P	10	1.3
SBT40-M16-60	125.4	60	33	27	12	63	29	17	M16*2.0P	10	1.2
SBT40-M16-90	155.4	90	63	27	12	63	29	17	M16*2.0P	10	1.3
SBT40-M16-110	175.4	110	83	27	12	63	29	17	M16*2.0P	10	1.4
SBT50-M08-60	161.8	60	22	38	12	100	15.4	8.5	M8*1.25P	10	
SBT50-M08-90	191.8	90	52	38	12	100	15.4	8.5	M8*1.25P	10	3.8
SBT50-M08-110	211.8	110	72	38	12	100	15.4	8.5	M8*1.25P	10	3.8
SBT50-M10-60	161.8	60	22	38	12	100	19	10.5	M10*1.5P	10	
SBT50-M10-90	191.8	90	52	38	12	100	19	10.5	M10*1.5P	10	3.8
SBT50-M10-110	211.8	110	72	38	12	100	19	10.5	M10*1.5P	10	3.8
SBT50-M12-60	161.8	60	22	38	12	100	24	12.5	M12*1.75P	10	
SBT50-M12-90	191.8	90	52	38	12	100	24	12.5	M12*1.75P	10	3.9
SBT50-M12-110	211.8	110	72	38	12	100	24	12.5	M12*1.75P	10	3.9
SBT50-M16-60	161.8	60	22	38	12	100	29	17	M16*2.0P	10	3.9
SBT50-M16-90	191.8	90	52	38	12	100	29	17	M16*2.0P	10	3.9
SBT50-M16-110	211.8	110	72	38	12	100	29	17	M16*2.0P	10	3.9



CNC TOOLS
数控刀柄

数控刀柄系列CNC TOOL SYSTEMS

SBT-M 螺纹连接刀柄（斜柄）


SBT-M THERADED CHUCK



P.129




P.M21

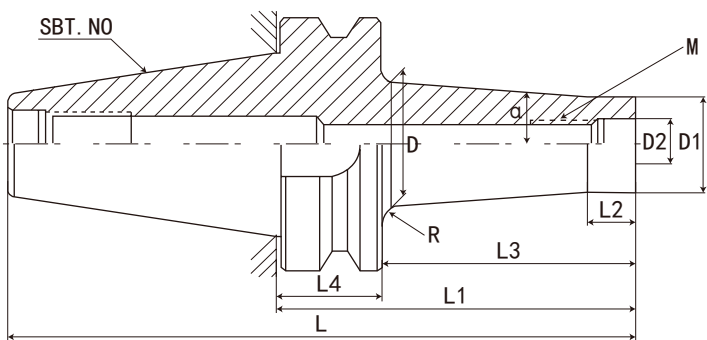

规格 Model	L	L1	L2	L3	L4	D	D1	D2	M	α	R	重量 KGS
SBT30-M08-60-A5	109.3	60	12	39	22	19.5	15.4	8.5	M8*1.25P	5°	4	
SBT30-M08-90-A5	139.3	90	12	69	22	24.5	15.4	8.5	M8*1.25P	5°	4	
SBT30-M10-60-A4	109.3	60	12	39	22	22	19	10.5	M10*1.5P	4°	4	
SBT30-M10-90-A4	139.3	90	12	69	22	26	19	10.5	M10*1.5P	4°	4	
SBT30-M12-60-A4	109.3	60	12	39	22	27	24	12.5	M12*1.75P	4°	4	
SBT30-M12-90-A4	139.3	90	12	69	22	31.5	24	12.5	M12*1.75P	4°	2	
SBT30-M16-60-A4	109.3	60	12	39	22	32.5	29	17	M16*2.0P	4°	2	
SBT30-M16-90-A4	139.3	90	12	69	22	36.5	29	17	M16*2.0P	4°	2	
SBT40-M08-60-A5	126.4	60	12	34	27	18	15.4	8.5	M8*1.25P	5°	5	
SBT40-M08-90-A5	156.4	90	12	64	27	23.5	15.4	8.5	M8*1.25P	5°	5	
SBT40-M08-110-A5	176.4	110	12	84	27	27	15.4	8.5	M8*1.25P	5°	5	
SBT40-M08-150-A5	216.4	150	12	124	27	34	15.4	8.5	M8*1.25P	5°	5	
SBT40-M08-200-A5	266.4	200	12	174	27	42.5	15.4	8.5	M8*1.25P	5°	5	
SBT40-M10-60-A4	126.4	60	12	34	27	21.5	19	10.5	M10*1.5P	4°	5	
SBT40-M10-90-A4	156.4	90	12	64	27	25.5	19	10.5	M10*1.5P	4°	5	
SBT40-M10-110-A4	176.4	110	12	84	27	28.5	19	10.5	M10*1.5P	4°	5	
SBT40-M10-150-A4	216.4	150	12	124	27	34	19	10.5	M10*1.5P	4°	5	
SBT40-M10-200-A4	266.4	200	12	174	27	41	19	10.5	M10*1.5P	4°	5	
SBT40-M12-60-A4	126.4	60	12	34	27	25.5	23	12.5	M12*1.75P	4°	5	
SBT40-M12-90-A4	156.4	90	12	64	27	29.5	23	12.5	M12*1.75P	4°	5	
SBT40-M12-110-A4	176.4	110	12	84	27	32.5	23	12.5	M12*1.75P	4°	5	
SBT40-M12-135-A4	201.4	135	12	109	27	36	23	12.5	M12*1.75P	4°	5	
SBT40-M12-150-A4	216.4	150	12	124	27	38	23	12.5	M12*1.75P	4°	5	
SBT40-M12-200-A4	266.4	200	12	174	27	45	23	12.5	M12*1.75P	4°	5	
SBT40-M16-60-A4	126.4	60	12	34	27	31	28.8	17	M16*2.0P	4°	5	
SBT40-M16-90-A4	156.4	90	12	64	27	35.5	28.8	17	M16*2.0P	4°	5	
SBT40-M16-110-A4	176.4	110	12	84	27	38	28.8	17	M16*2.0P	4°	5	
SBT40-M16-135-A4	201.4	135	12	109	27	41.5	28.8	17	M16*2.0P	4°	5	
SBT40-M16-150-A4	216.4	150	12	124	27	43.5	28.8	17	M16*2.0P	4°	5	
SBT40-M16-200-A4	266.4	200	12	174	27	50.5	28.8	17	M16*2.0P	4°	5	


SBT50-M 螺纹连接刀柄 (斜柄)

SBT50-M THERADED CHUCK



P.129

P.M21

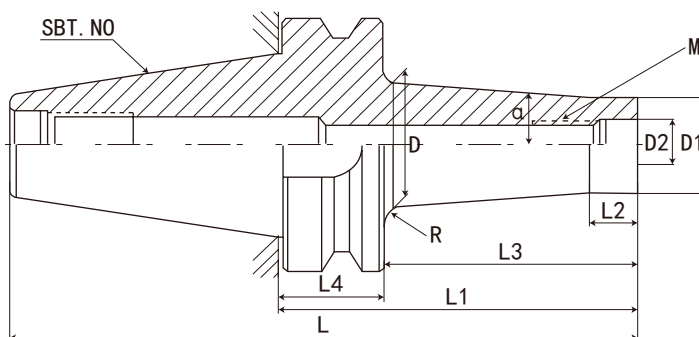

规格 Model	L	L1	L2	L3	L4	D	D1	D2	M	α	R	重量 KGS
SBT50-M08-60-A5	163.3	60	12	23.5	38	17.5	15.4	8.5	M8*1.25P	5°	10	
SBT50-M08-90-A5	193.3	90	12	53.5	38	20.5	15.4	8.5	M8*1.25P	5°	10	
SBT50-M08-110-A5	213.3	110	12	73.5	38	24	15.4	8.5	M8*1.25P	5°	10	
SBT50-M08-150-A5	253.3	150	12	113.5	38	31	15.4	8.5	M8*1.25P	5°	10	
SBT50-M08-200-A5	303.3	200	12	163.5	38	40	15.4	8.5	M8*1.25P	5°	10	5
SBT50-M08-250-A5	353.3	250	12	213.5	38	48.5	15.4	8.5	M8*1.25P	5°	10	
SBT50-M08-300-A5	403.3	300	12	263.5	38	57.5	15.4	8.5	M8*1.25P	5°	10	
SBT50-M10-60-A4	163.3	60	12	23.5	38	20.5	19	10.5	M10*1.5P	4°	10	
SBT50-M10-90-A4	193.3	90	12	53.5	38	23	19	10.5	M10*1.5P	4°	10	
SBT50-M10-110-A4	213.3	110	12	73.5	38	26	19	10.5	M10*1.5P	4°	10	4
SBT50-M10-150-A4	253.3	150	12	113.5	38	31.5	19	10.5	M10*1.5P	4°	10	
SBT50-M10-200-A4	303.3	200	12	163.5	38	38.5	19	10.5	M10*1.5P	4°	10	
SBT50-M10-250-A4	353.3	250	12	213.5	38	45.5	19	10.5	M10*1.5P	4°	10	
SBT50-M10-300-A4	403.3	300	12	263.5	38	52.5	19	10.5	M10*1.5P	4°	10	6.4
SBT50-M12-60-A4	163.3	60	12	23.5	38	25.5	24	12.5	M12*1.75P	4°	10	
SBT50-M12-90-A4	193.3	90	12	53.5	38	28	24	12.5	M12*1.75P	4°	10	
SBT50-M12-110-A4	213.3	110	12	73.5	38	31	24	12.5	M12*1.75P	4°	10	
SBT50-M12-135-A4	238.3	135	12	98.5	38	34.5	24	12.5	M12*1.75P	4°	10	
SBT50-M12-150-A4	253.3	150	12	113.5	38	36.5	24	12.5	M12*1.75P	4°	10	
SBT50-M12-200-A4	303.3	200	12	163.5	38	43.5	24	12.5	M12*1.75P	4°	10	
SBT50-M12-250-A4	353.3	250	12	213.5	38	50.5	24	12.5	M12*1.75P	4°	10	
SBT50-M12-300-A4	403.3	300	12	263.5	38	57.5	24	12.5	M12*1.75P	4°	10	
SBT50-M16-60-A4	163.3	60	12	23.5	38	30.5	29	17	M16*2.0P	4°	10	
SBT50-M16-90-A4	193.3	90	12	53.5	38	33	29	17	M16*2.0P	4°	10	
SBT50-M16-110-A4	213.3	110	12	73.5	38	36	29	17	M16*2.0P	4°	10	
SBT50-M16-135-A4	238.3	135	12	98.5	38	39.5	29	17	M16*2.0P	4°	10	
SBT50-M16-150-A4	253.3	150	12	113.5	38	41.5	29	17	M16*2.0P	4°	10	4.8
SBT50-M16-200-A4	303.3	200	12	163.5	38	48.5	29	17	M16*2.0P	4°	10	5.5
SBT50-M16-250-A4	353.3	250	12	213.5	38	55.5	29	17	M16*2.0P	4°	10	
SBT50-M16-300-A4	403.3	300	12	263.5	38	62.5	29	17	M16*2.0P	4°	10	


数控刀柄系列CNC TOOL SYSTEMS

SBT-MOD 模块刀柄


SBT-MOD MODULAR TOOL HOLDER



P.129

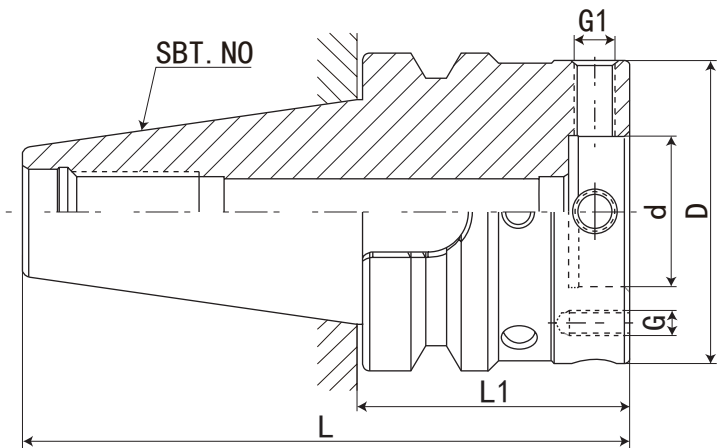



规格 Model	L	L1	D	d	G1	G	重量 KGS
SBT30-MOD060-040	88.4	40	60	30	M8*1.0P	M5*0.8P	0.7
SBT30-MOD070-040	88.4	40	70	35	M8*1.0P	M6*1.0P	0.8
SBT40-MOD060-055	120.4	55	60	30	M8*1.0P	M5*0.8P	1.5
SBT40-MOD070-055	120.4	55	70	35	M8*1.0P	M6*1.0P	1.6
SBT40-MOD080-065	130.4	65	80	40	M8*1.0P	M6*1.0P	2
SBT40-MOD100-070	135.4	70	100	50	M10*1.0P	M8*1.25P	2.6
SBT45-MOD060-065	147.8	65	60	30	M8*1.0P	M5*0.8P	3
SBT45-MOD070-065	147.8	65	70	35	M8*1.0P	M6*1.0P	3.1
SBT45-MOD080-065	147.8	65	80	40	M8*1.0P	M6*1.0P	3.3
SBT45-MOD100-075	157.8	75	100	50	M10*1.0P	M8*1.25P	3.5
SBT45-MOD117-075	157.8	75	117	60	M10*1.0P	M8*1.25P	4.4
SBT50-MOD060-070	171.8	70	60	30	M8*1.0P	M5*0.8P	4.8
SBT50-MOD070-070	171.8	70	70	35	M8*1.0P	M6*1.0P	4.9
SBT50-MOD080-070	171.8	70	80	40	M8*1.0P	M6*1.0P	5.1
SBT50-MOD100-070	171.8	70	100	50	M10*1.0P	M8*1.25P	5.3
SBT50-MOD117-080	181.8	80	117	60	M10*1.0P	M8*1.25P	6.3
SBT50-MOD140-080	181.8	80	140	80	M10*1.0P	M8*1.25P	6.6

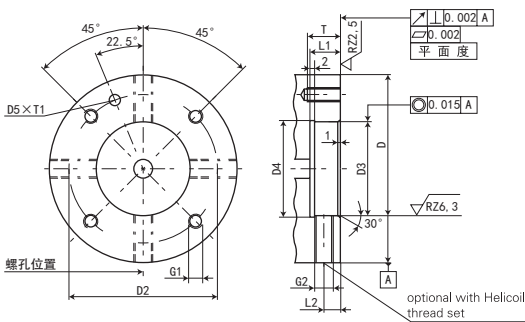

Nominal size module diameter D	32	40	50	63	80	100	125	160
D2+/-0.1	44	53	63	79	96	119	150	185
D3F8	30	35	40	50	60	80	100	120
D4	31	36	41	51	61	81	101	121
D5	4.5	5	5	5	6	6	6	6
L1	12	12	12	14	14	14	24	37
L2	7	7	7	8	8	8	8	8
G1	M5	M6	M6	M8	M8	M10	M12	M12
G2	M8*1	M8*1	M8*1	M10*1	M10*1	M10*1	M10*1	M10*1
T	11	14	14	15	15	18	25	25
T1+0.5	3	3.5	3.5	3.5	4.5	4.5	4.5	4.5

MOD 法兰盘

MOD FLANGE PLATE

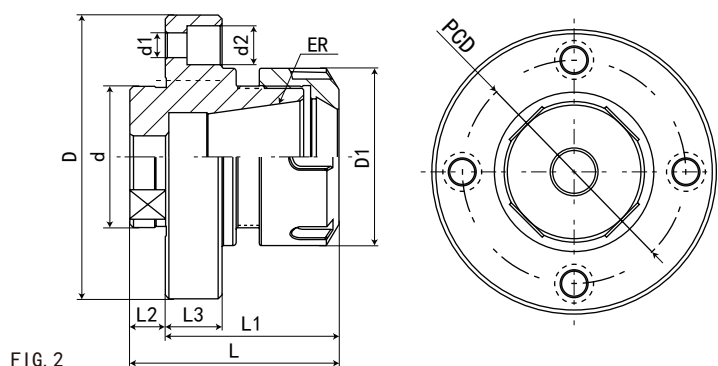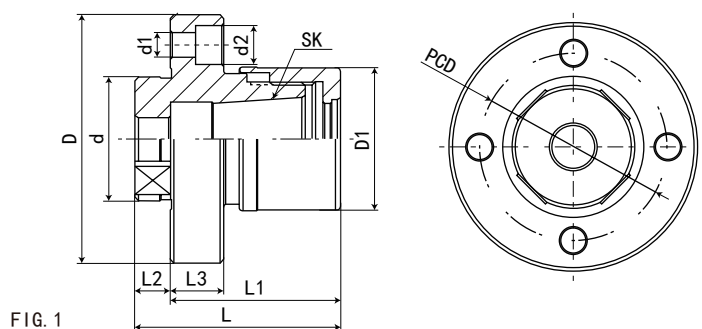

规格 Model	D	D1	d	d1	d2	L	L1	L2	L3	PCD	FIG	重量 KGS
MOD060-GSK16-48	60	40	30	6	9	58	48	10	15	44	1	
MOD070-GSK16-48	70	40	35	7	11	58	48	10	15	53	1	
MOD080-GSK16-49	80	40	40	7	11	59	49	10	16	63	1	
MOD080-ER32-49	80	50	40	7	11	59	49	10	16	63	2	
MOD100-ER40-63	100	63	50	9	14	75	63	12	18	79	2	




CNC TOOLS
数控刀柄

数控刀柄系列 CNC TOOL SYSTEMS




SBT-MOD 可调精度刀柄（铰刀专用） SBT-MOD ADJUSTABLE CHUCK (REAMER USING)



P.129

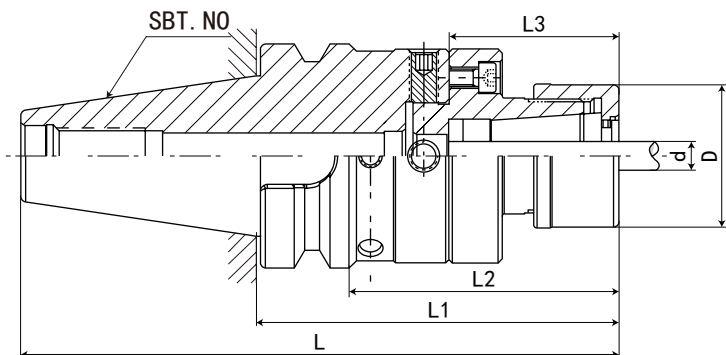

规格 Model	L	L1	L2	L3	D	d 夹持范围 Range	弹性筒夹 Collets
SBT30-MOD060-GSK16-88	136.4	88	66	48	40	3-16mm	GSK16
SBT30-MOD070-GSK16-88	136.4	88	66	48	40	3-16mm	GSK16
SBT40-MOD060-GSK16-103	168.4	103	76	48	40	3-16mm	GSK16
SBT40-MOD070-GSK16-103	168.4	103	76	48	40	3-16mm	GSK16
SBT40-MOD080-ER32-114	179.4	114	87	49	50	2-20mm	ER32
SBT40-MOD080-GSK16-114	179.4	114	87	49	40	3-16mm	GSK16
SBT40-MOD100-ER40-133	198.4	133	106	63	63	2-26mm	ER40
SBT50-MOD060-GSK16-118	219.8	118	80	48	40	3-16mm	GSK16
SBT50-MOD070-GSK16-118	219.8	118	80	48	40	3-16mm	GSK16
SBT50-MOD080-ER32-119	220.8	119	81	49	50	2-20mm	ER32
SBT50-MOD080-GSK16-119	220.8	119	81	49	40	3-16mm	GSK16
SBT50-MOD100-ER40-133	134.8	133	95	63	63	2-26mm	ER40

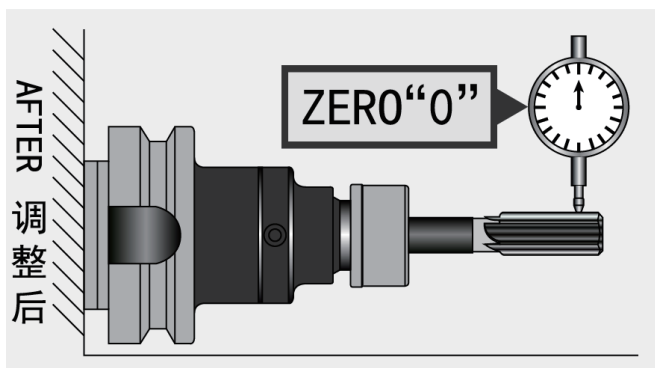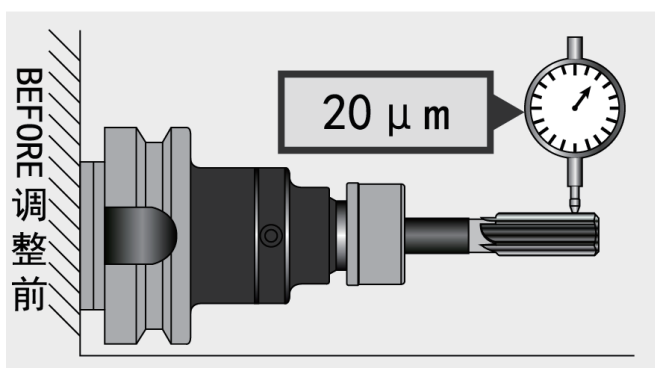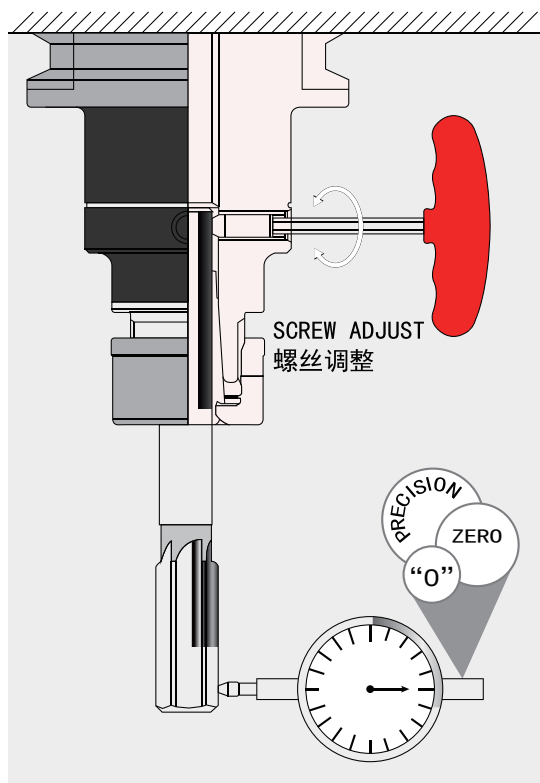

特点:


- ◎ 刀尖位置可调至“0”位置
- ◎ 机械主轴、夹头、刀具的累计误差值可一次调整修正

Features:

- ◎ The tool tip position can be adjusted as “0” position.
- ◎ The accumulated error value of the spindle, the chuck, and the tool can all be adjusted and corrected at the same time.



SBT30- 基础柄刀柄

SBT30 SEMI-FINISHED TOOL HOLDER

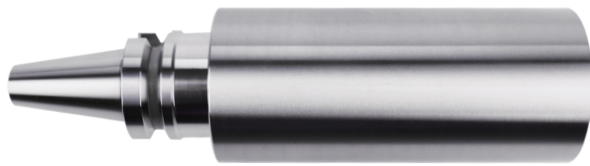

P.129

- 锥柄硬度 HRC50-53
- 前端硬度 HRC40-45
- Taper shank hardness HRC50-53
- Front end hardness HRC40-45

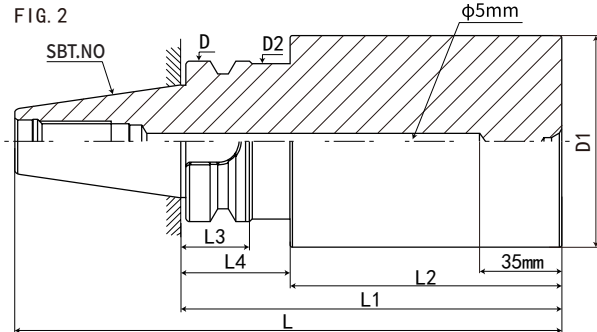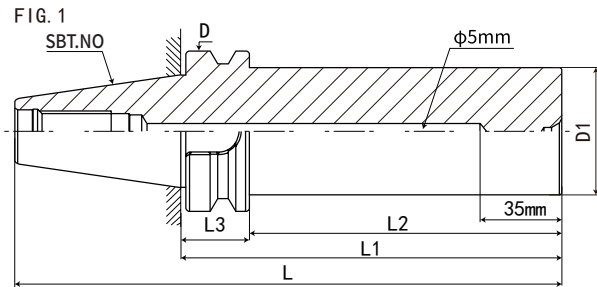

规格 Model	L	L1	L2	L3	L4	D	D1	D2	FIG	重量 KGS
SBT30-D50-100	148.4	100	68	32	22	50	46	44	2	
SBT30-D50-125	173.4	125	93	32	22	50	46	44	2	
SBT30-D50-150	198.4	150	118	32	22	50	46	44	2	
SBT30-D63-100	148.4	100	68	32	22	63	46	44	2	
SBT30-D63-125	173.4	125	93	32	22	63	46	44	2	
SBT30-D63-150	198.4	150	118	32	22	63	46	44	2	
SBT30-D83-100	148.4	100	68	32	22	83	46	44	2	
SBT30-D83-125	173.4	125	93	32	22	83	46	44	2	
SBT30-D102-125	173.4	125	93	32	22	102	46	44	2	
SBT40-D50-100	165.4	100	73	-	27	50	63	-	1	
SBT40-D50-150	215.4	150	123	-	27	50	63	-	1	
SBT40-D50-200	265.4	200	173	-	27	50	63	-	1	
SBT40-D63-100	165.4	100	63	37	27	63	63	61	2	
SBT40-D63-150	215.4	150	113	37	27	63	63	61	2	
SBT40-D63-200	265.4	200	163	37	27	63	63	61	2	
SBT40-D63-250	315.4	250	213	37	27	63	63	61	2	
SBT40-D83-100	165.4	100	63	37	27	83	63	61	2	
SBT40-D83-150	215.4	150	113	37	27	83	63	61	2	
SBT40-D83-200	265.4	200	163	37	27	83	63	61	2	
SBT40-D83-250	315.4	250	213	37	27	83	63	61	2	
SBT40-D102-150	215.4	150	113	37	27	102	63	61	2	
SBT50-D102-100	201.8	100	52	48	38	102	100	98	2	
SBT50-D102-150	251.8	150	102	48	38	102	100	98	2	
SBT50-D102-200	301.8	200	152	48	38	102	100	98	2	
SBT50-D102-250	351.8	250	202	48	38	102	100	98	2	
SBT50-D102-300	401.8	300	252	48	38	102	100	98	2	
SBT50-D127-150	251.8	150	102	48	38	127	100	98	2	
SBT50-D127-200	301.8	200	152	48	38	127	100	98	2	



CNC TOOLS
数控刀柄